
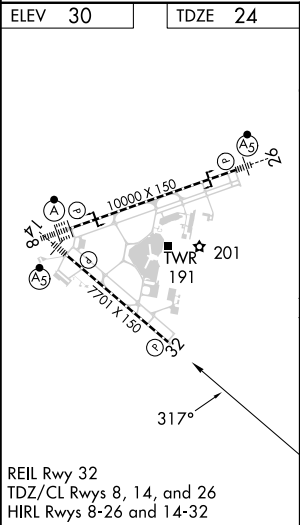


WAAS CH 40199 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	7701 24 30
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Z RWY 32

JACKSONVILLE INTL (JAX)

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.			MISSED APPROACH: Climb to 2000 direct OSBAJ and hold.		
D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC

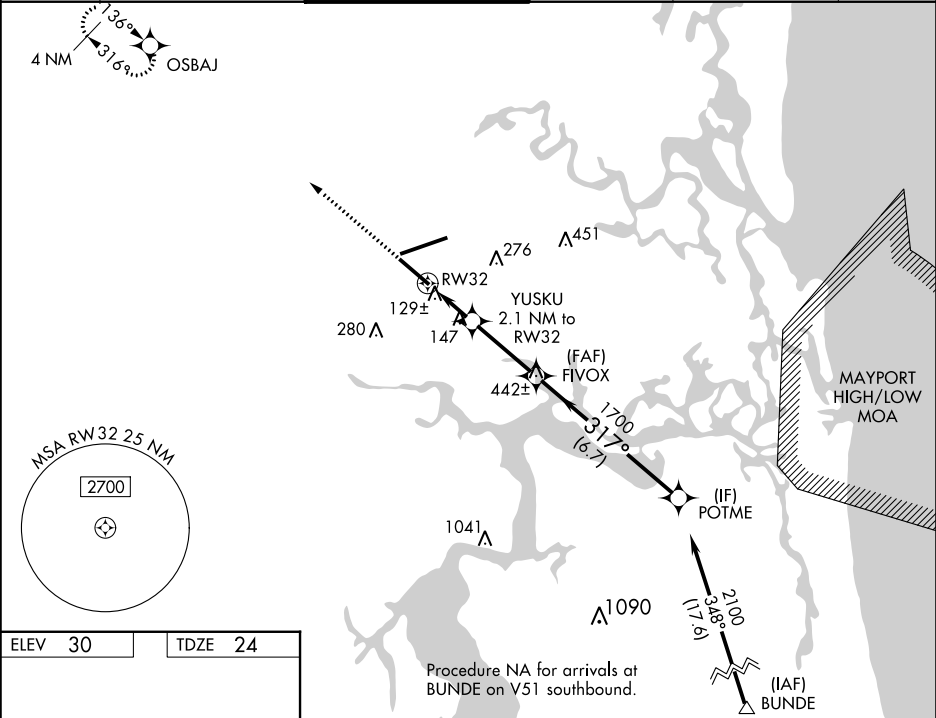

2000 OSBAJ	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 67).			
*LNAV only.	YUSKU 2.1 NM to RW32	FIVOX 1700	POTME 2100	GP 3.00° TCH 50
	1 NM	1.1 NM	3 NM	6.7 NM
CATEGORY	A	B	C	D
LPV DA	336-1 312 (400-1)			
LNAV/VNAV DA	387-1¼ 363 (400-1¼)			
LNAV MDA	400-1 376 (400-1)			
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	640-2 610 (700-2)