RNAV (GPS) RWY 29

GEORGETOWN EXEC (GTU)

APP CRS	Rwy Idg	4099
295°	TDZE	777
	Apt Elev	790

RNP APCH.

Rwy 29 helicopter visibility reduction below ¾ SM NA. VDP NA when using Skylark Field altimeter setting. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet increase LNAV and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 3000 direct DARTE and hold.

ATIS	AUSTIN APP CON	GEORGETOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
118.6	119.0 370.85	120.225 (CTAF) L	119.125	119.125	121.1 (when twr closed)	123.0

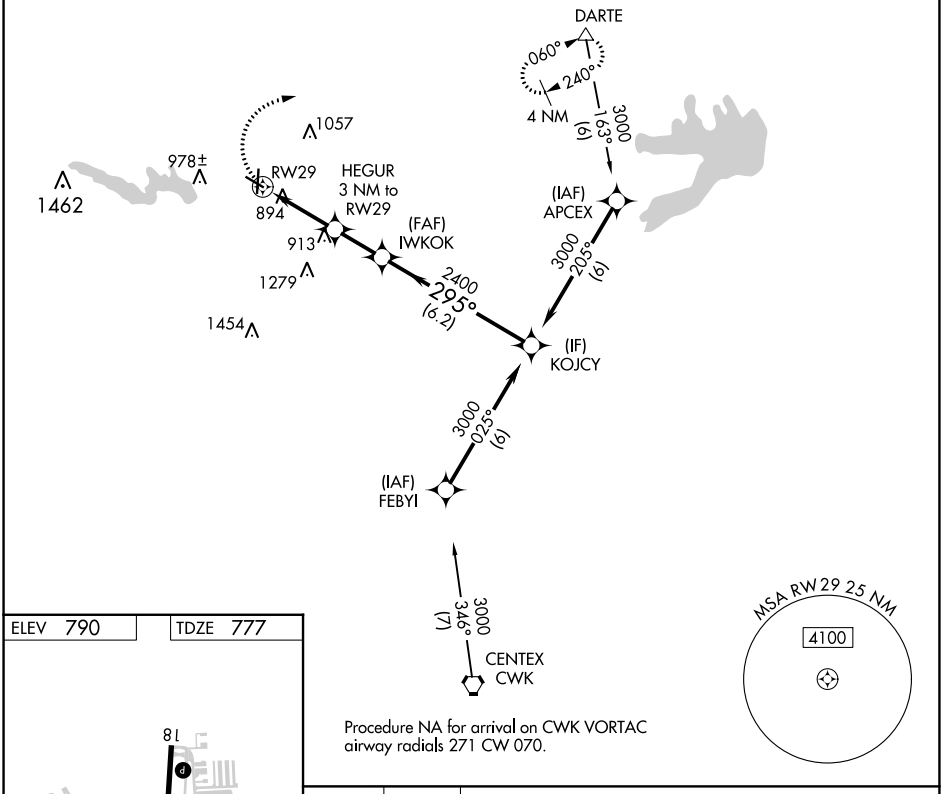

ELEV 790 TDZE 777



REIL Rwys 18 and 36 L
MIRL Rwys 11-29 and 18-36 L

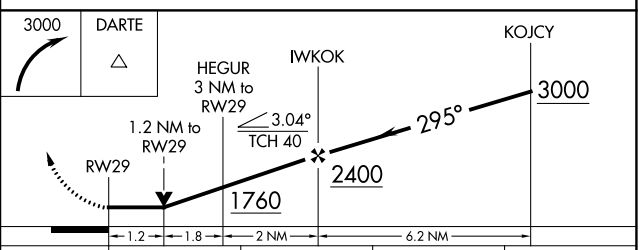

CATEGORY	A	B	C	D
LNAV MDA	1220-1 443 (500-1)		1220-1⅜ 443 (500-1⅜)	
C CIRCLING	1240-1 450 (500-1)	1340-1 550 (600-1)	1360-1½ 570 (600-1½)	1640-2¾ 850 (900-2¾)

SC-3, 01 DEC 2022 to 29 DEC 2022
SC-3, 01 DEC 2022 to 29 DEC 2022