

WAAS CH 50420 W30A	APP CRS 297°	Rwy Idg TDZE 939 Apt Elev 940
--	------------------------	---


RNAV (GPS) RWY 30

M GRAHAM CLARK DOWNTOWN (PLK)

Baro-VNAV NA when using Branson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with KBBG altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Branson altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ½ mile.

MISSED APPROACH:
Climb to 3200 direct
RAWBE and hold.

SPRINGFIELD APP CON 126.35	UNICOM 122.7 (CTAF) 0
--------------------------------------	---------------------------------

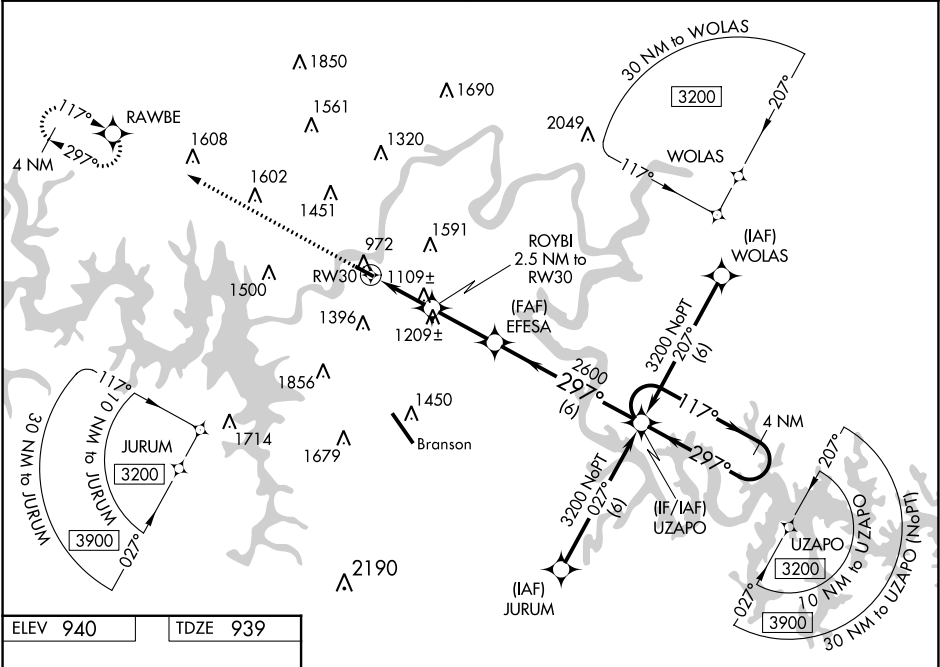

ELEV 940 TDZE 939

3200 RAWBE

*LNAV only

ROYBI 2.5 NM to RW30

EFESA 2600

UZAPO

117° → 3200

← 297°

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
LPV DA	1189-¾	250 (300-¾)		NA
LNAV/VNAV DA	1224-⅞	285 (300-⅞)		NA
LNAV MDA	1360-1	421 (500-1)		NA
CIRCLING	1560-1	620 (700-1)		NA

NC-3, 01 DEC 2022 to 29 DEC 2022

NC-3, 01 DEC 2022 to 29 DEC 2022