

LOC I-HSA <u>110.35</u>	APP CRS 182°	Rwy Idg 8498 TDZE 23 Apt Elev 23
-----------------------------------	------------------------	---

ILS Z or LOC Z RWY 18
STENNIS INTL (HSA)

STENNIS INTL (HSA)

A Circling NA for Cat E W of Rwy 18-36. ADF or DME required. When local altimeter setting not retrieved, use Gulfport altimeter setting; increase SDA to 270 feet; increase all MDA 60 feet and S-LOC 18 Cats C/D/E visibility $\frac{1}{8}$ mile, Circling Cat C visibility $\frac{1}{8}$ mile and Cats D/E visibility $\frac{1}{4}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cats C/D/E visibility $\frac{1}{4}$ mile, and Circling Cats D/E $\frac{1}{4}$ mile. For inop MALSR, increase S-ILS 18 Cat E visibility to $\frac{1}{4}$ mile, and S-LOC 18 Cats C/D/E visibility to $\frac{1}{8}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cats C/D/E visibility to 1 mile. For inop MALSR when using Gulfport altimeter setting, increase S-ILS 18 Cat E visibility to $\frac{1}{4}$ mile and S-LOC Cat E visibility to $\frac{1}{8}$ mile. WUDGU FIX minimums: increase S-LOC 18 Cat E visibility to $\frac{1}{4}$ mile.


MALS®



MISSED APPROACH:
Climb to 700 then
climbing left turn to
2000 on heading
010° and on PCU
VOR/DME R-077 to
STENN INT and hold.

AWOS-3PT 118.375	GULFPORT APP CON★ 124.6 354.1 (130°-309°) 127.5 254.25 (310°-129°)	STENNIS TOWER★ 127.15 (CTAF) 0	GND CON 121.725	UNICOM 122.95
----------------------------	--	---	---------------------------	-------------------------

ADF or DME REQUIRED

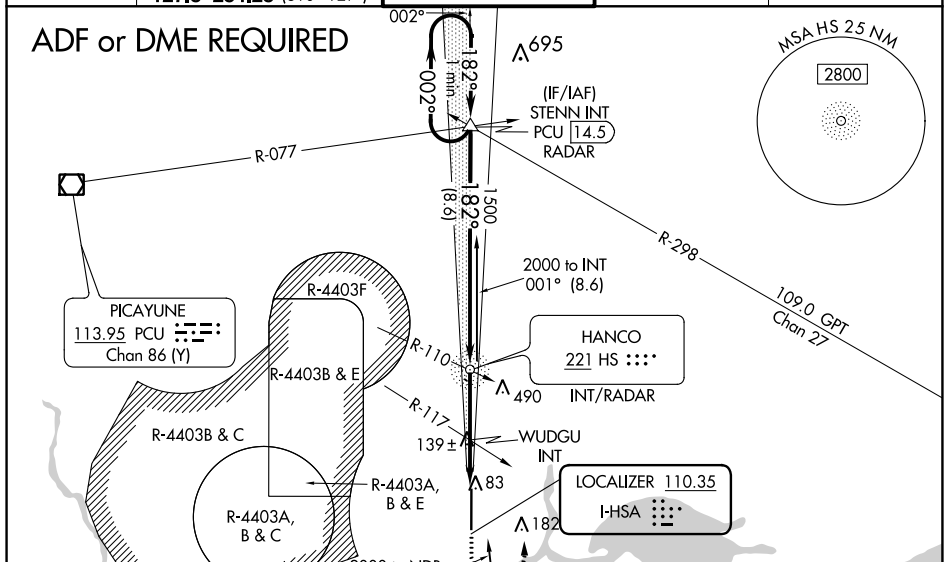

SC-4, 01 DEC 2022 to 29 DEC 2022

