


LOC/DME I-BXN 111.9 Chan 56	APP CRS 356°	Rwy 36L Idg 13400 TDZE 588 Apt Elev 607	Rwy 36R Idg 13401 TDZE 581 Apt Elev 607
---	------------------------	--	--


ILS or LOC RWY 36L
DALLAS-FORT WORTH INTL (DFW)

▼ Inop table does not apply to Sidestep 36R. Simultaneous approach authorized with Rwy 35L/C/R. DME or RADAR required. For inop ALS, increase S-LOC 36L Cat C and D visibility to 1½ SM. For inop ALS, increase CIRIS fix minimums Cat C and D visibility to RVR 4500.	Rwys 36L/R MALSR As	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 on heading 315° and CVE VOR/DME R-298 to KAGLE INT/ CVE VOR/DME 39 DME and hold.
--	---------------------------	---

D-ATIS ARR 123.775 DEP 135.925	REGIONAL APP CON 118.425	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC
--	------------------------------------	---	---	---------------------------	-------

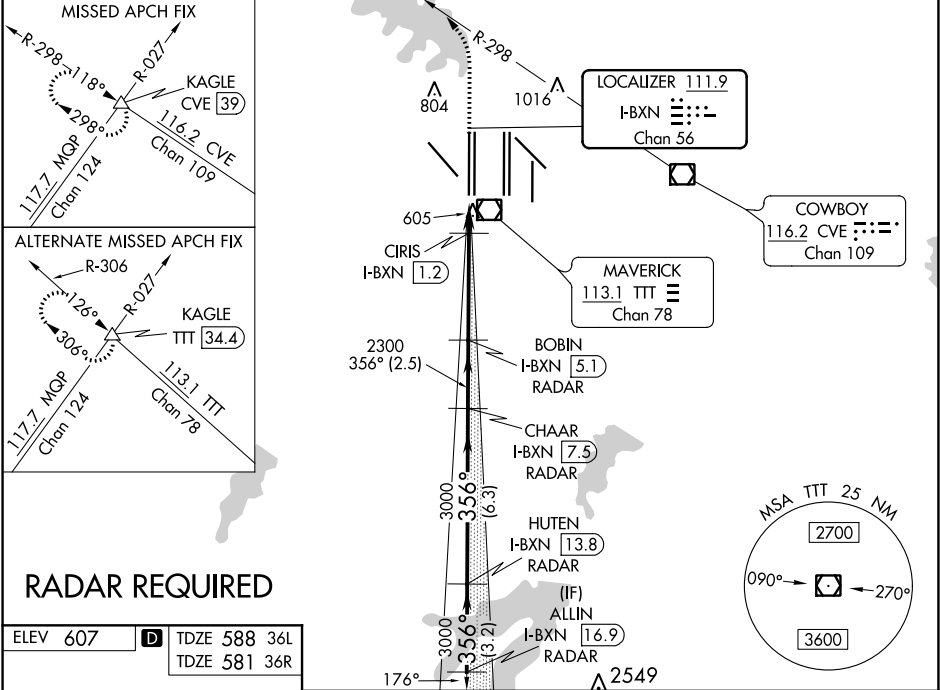

ELEV 607	D	TDZE 588 36L TDZE 581 36R
-----------------	----------	--

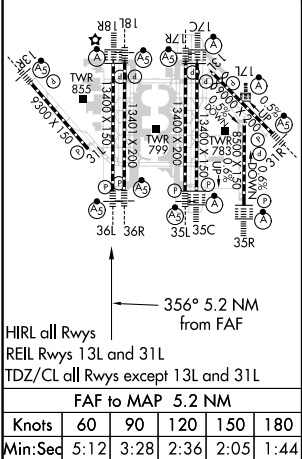

1100	3000	CVE R-298	KAGLE	BOBIN I-BXN [5.1] RADAR	CHAAR I-BXN [7.5] RADAR	HUTEN I-BXN [13.8] RADAR	ALLIN I-BXN [16.9] RADAR
hdg 315°							
*LOC only	I-BXN DME ANTENNA	CIRIS I-BXN [1.2]	2300	3000	3000	3000	4000
	I-BXN [0.2]	I-BXN [0.5]	*1080	2300			
	0.7 NM	0.7	3.8 NM	2.5 NM	6.3 NM	3.2 NM	
CATEGORY	A	B	C	D			
S-ILS 36L		788/18	200 (200-½)				
S-LOC 36L	1080/24	492 (500-½)	1080/50	492 (500-1)			
SIDESTEP 36R	1080/50	499 (500-1)	1080-1½	499 (500-1½)			
	CIRIS FIX MINIMUMS (DME required)						
S-LOC 36L		880/24	292 (300-½)				