RNAV (GPS) RWY 15

WASECA MUNI/MAYNARD RICHARD STENSRUD FLD (ACQ)

WAAS	APP CRS	Rwy Idg	3399
CH 70532	152°	TDZE	1127
W15A		Apt Elev	1127

RNP APCH.

Baro-VNAV NA when using Owatonna altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Procedure NA at night. When local altimeter setting not received, use Owatonna altimeter setting and increase all DA 34 feet and all MDAs 40 feet; increase LNAV/VNAV visibility all Cats ⅛ SM, LNAV and Circling Cat C visibility ¼ SM. Rwy 15 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct VUYUN and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.425	135.0 306.9	122.8 (CTAF) L

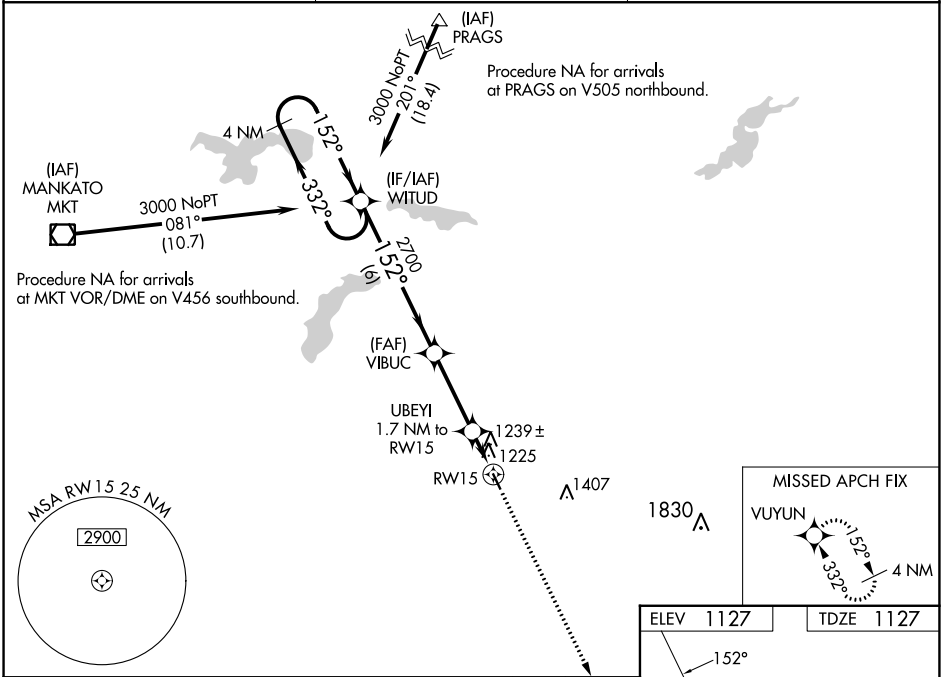

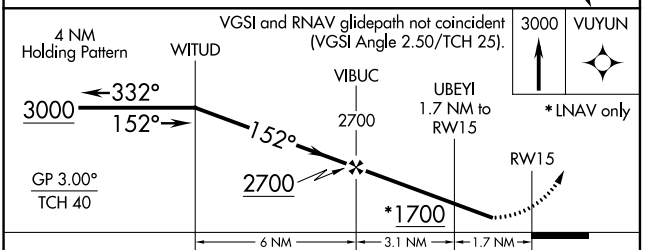

CATEGORY	A	B	C	D
LPV DA	1377-1	250 (300-1)		NA
LNAV/VNAV DA	1516-1⅛	389 (400-1⅛)		NA
LNAV MDA	1540-1	413 (500-1)	1540-1⅛ 413 (500-1⅛)	NA
C CIRCLING	1560-1 433 (500-1)	1620-1 493 (500-1)	1760-1¾ 633 (700-1¾)	NA

NC-1, 01 DEC 2022 to 29 DEC 2022
NC-1, 01 DEC 2022 to 29 DEC 2022