

WAAS CH 60939 W04A	APP CRS 045°	Rwy Idg 5002 TDZE 112 Apt Elev 112
--	------------------------	---



RNAV (GPS) RWY 4

DEMOPOLIS RGNL (DYA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Marion altimeter setting and increase LPV and LNAV/VNAV DA 82 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility 3⁄8 mile, increase LNAV Cats C/D and Circling Cat C visibility 1⁄4 mile, and increase Circling Cat D visibility 1⁄2 mile. Baro-VNAV and VDP NA when using Marion altimeter setting. Helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 3000 direct CUBNO and hold.

AWOS-3P 119.475	MERIDIAN APP CON* 119.2 348.7	UNICOM 122.8 (CTAF) 0
---------------------------	---	--

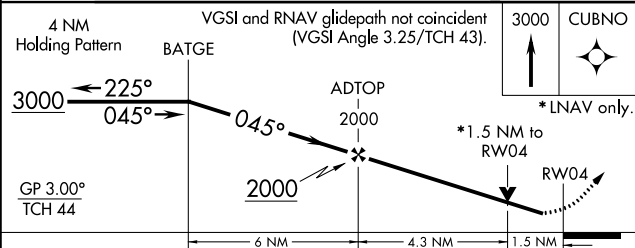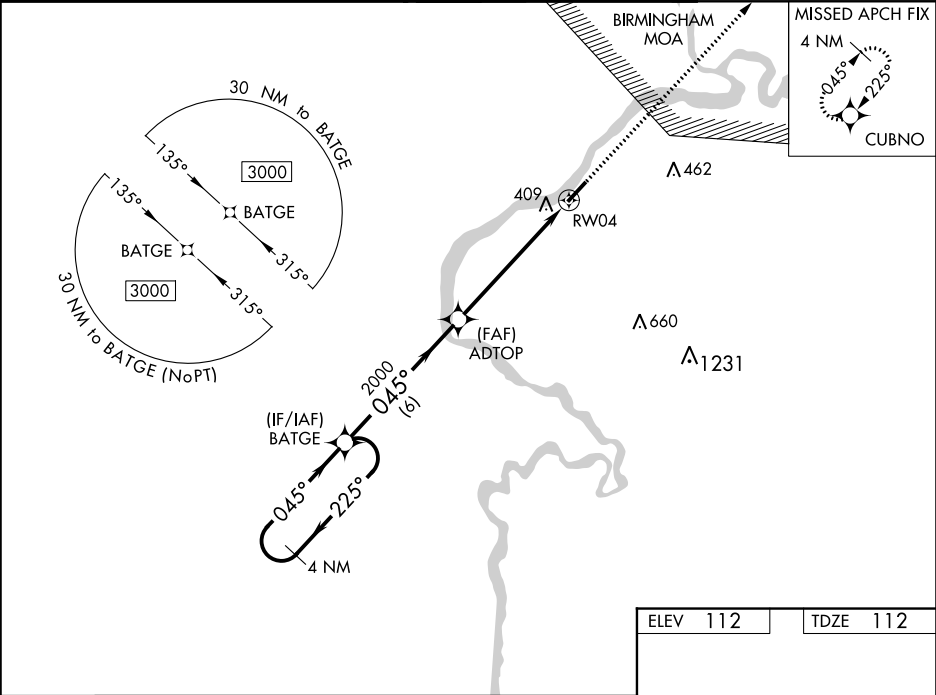

CATEGORY	A	B	C	D
LPV DA		362-3⁄4	250 (300-3⁄4)	
LNAV/VNAV DA		570-1½	458 (500-1½)	
LNAV MDA	660-1	548 (600-1)	660-1½	548 (600-1½)
C CIRCLING	720-1	608 (700-1)	720-1¾ 608 (700-1¾)	780-2 668 (700-2)

