

| | | |
|----------------------------|------------------------|--|
| LOC I-JDU 111.15 | APP CRS 319° | Rwy ldg 10000 TDZE 442 Apt Elev 459 |
|----------------------------|------------------------|--|


ILS or LOC RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

▽ For inop ALS, increase S-ILS 32R Cat E visibility to RVR 4000 and increase S-LOC visibility to RVR 5000.
▲ ASR *RVR 1800 authorized with use of FD or AP or HUD to DA.



MALS R MISSED APPROACH: Climb to 1500 then climbing right turn to 2400 on heading 194° and TOY VORTAC R-144 to EGNOC INT and hold.

| | | | | |
|------------------------------|--|------------------------------------|-------------------------------|------------------------------------|
| ATIS ★ 128.7 256.7 | ST LOUIS APP CON 125.2 281.5 | SCOTT TOWER 128.25 253.5 | GND CON 119.2 275.8 | CLNC DEL 119.875 263.025 |
|------------------------------|--|------------------------------------|-------------------------------|------------------------------------|

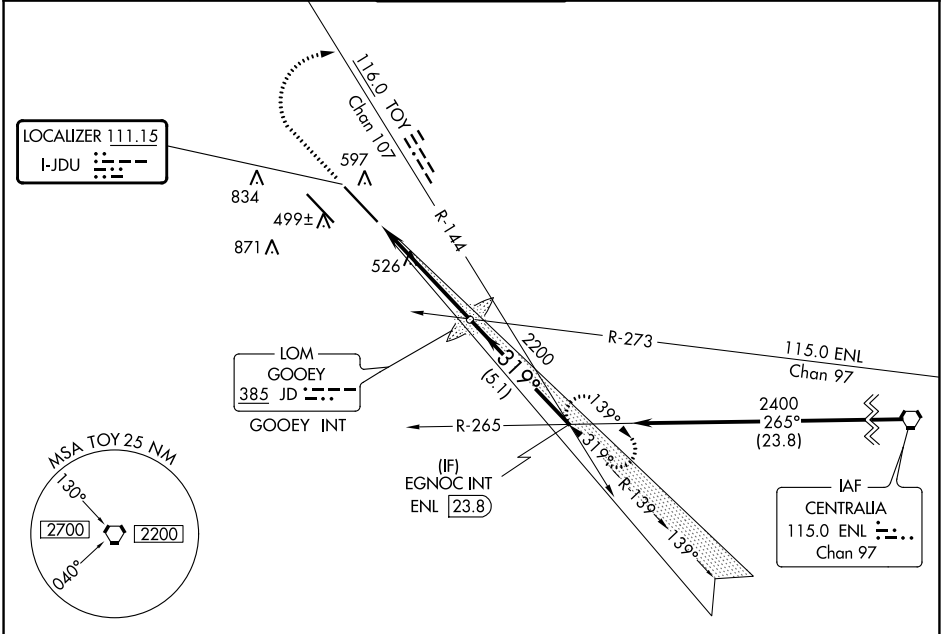

| | | |
|----------|----------|----------|
| ELEV 459 | D | TDZE 442 |
|----------|----------|----------|

▲ 1155 Procedure NA for arrivals on ENL VORTAC airway radials 225 CW 294.

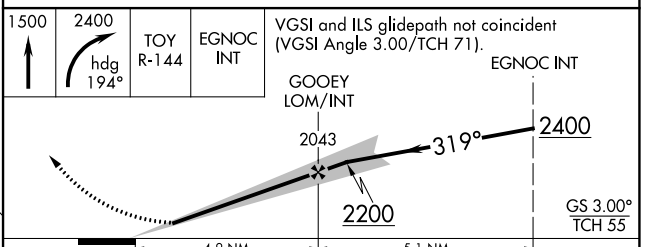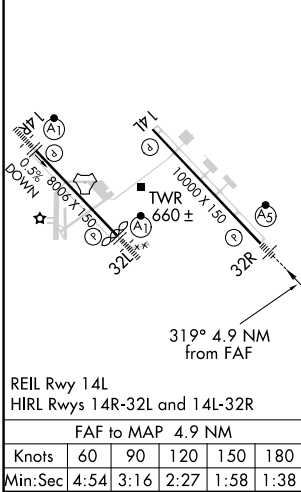

| CATEGORY | A | B | C | D | E |
|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|-------------------------|
| S-ILS 32R * | 642/24 200 (200-½) | | | | |
| S-LOC 32R | 780/24 | 338 (400-½) | 780/26 | 338 (400-½) | |
| C CIRCLING | 1000-1 541 (600-1) | 1120-1 661 (700-1) | 1240-2¼ 781 (800-2¼) | 1240-2½ 781 (800-2½) | 1240-2¾ 781 (800-2¾) |

EC-3, 26 JAN 2023 to 23 FEB 2023

EC-3, 26 JAN 2023 to 23 FEB 2023