BILOXI, MISSISSIPPI

ILS or LOC RWY 22

LOC I-BIX	APCH CRS	Rwy ldg 6630 THRE 17 Arpt Elev 33
109.7	217°	

AL-49 [USAF] KEESLER AFB (KBIX)

RADAR or DME required.

▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1½ miles.

ALSF-1 (A1)

† MISSED APPROACH: Climb to 800 tracking 217°, upon reaching 800 turn left to intercept BIX TACAN R-186 climbing to 2200 to 11 DME (RUDLF) and hold.

ATIS	GULFPORT APP CON	TOWER ★	GND CON	CLNC DEL
281.55	124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)	120.75 269.075	121.8 275.8	121.8 275.8

• 272

† Missed approach requires use of RNAV or ATC RADAR monitoring. Non-TACAN equipped aircraft expect ATC instructions.

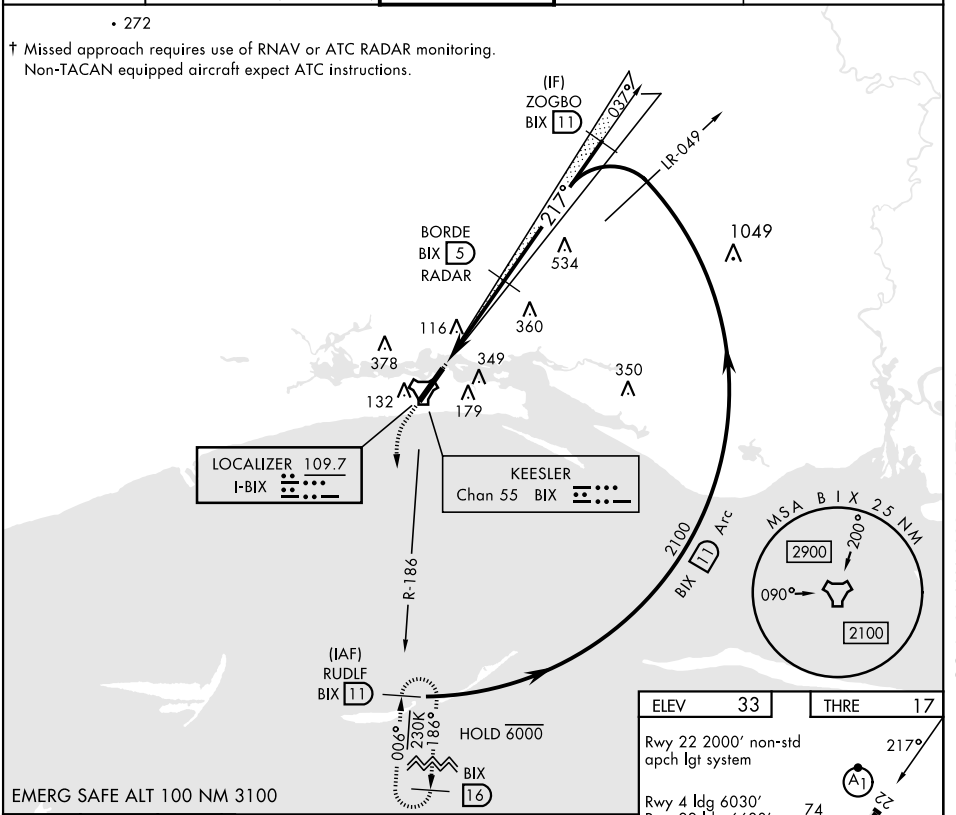

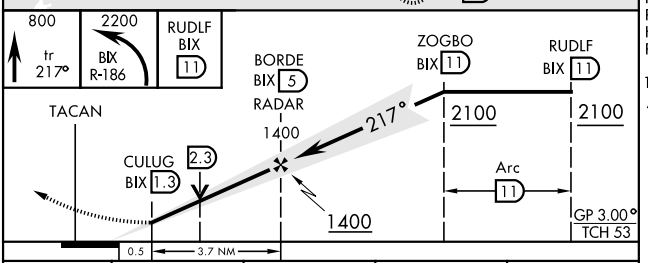

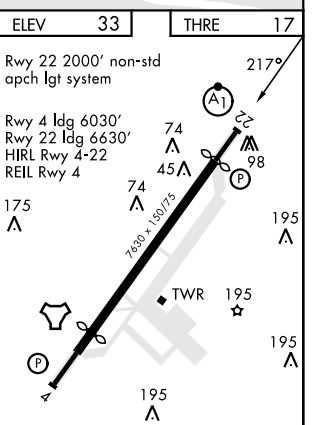

CATEGORY	A	B	C	D
S-ILS 22	217/40 200 (200-¾)			
S-LOC 22*	540/40 523 (600-¾)		540-1¼ 523 (600-1¼)	
C CIRCLING	580-1 547 (600-1)	660-1 627 (700-1)	680-1¾ 647 (700-1¾)	680-2 647 (700-2)

FAF to MAP 3.7 NM					
Knots	60	90	120	150	180
Min:Sec	3:42	2:28	1:51	1:29	1:14

SC-4, 26 JAN 2023 to 23 FEB 2023