

RNAV (GPS) RWY 35L

APCH CRS 003°	Rwy Idg 9217 THRE 1307 Arpt Elev 1307
------------------	--

AL-135 [USAF]

VANCE AFB (KEND)

RNP APCH.

RADAR required.

T * When ALS inop, increase vis to 1 mile.
Circling visibility reduction by helicopters not authorized.

SALS



MISSED APPROACH: Climb to 1900, then climbing left turn to 4300 direct CERPA and hold.

ATIS ★
115.4 26



	APP	CON	
125.45	388.2	(E)	
126.75	346.325	(W)	

TOWER ★
124.05 259.1

GND CON
121.8 289.4

CLNC DEL
225.4


FOR USE BY 71FTW
AIRCRAFT ONLY

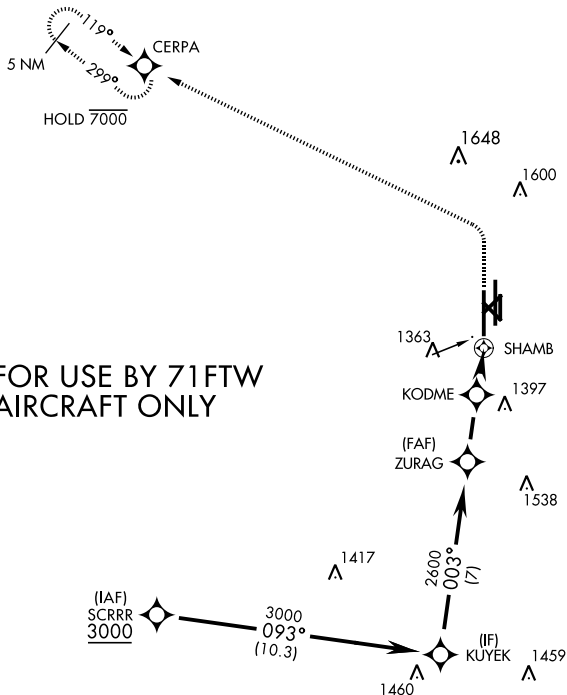

EMERG SAFE ALT 100 NM 4500

ELEV 1307		THRE 1307
-----------	--	-----------

HIRL Rwy 17C-35C, 17R-35L
MIRL Rwy 17L-35R
REIL Rwy 17L

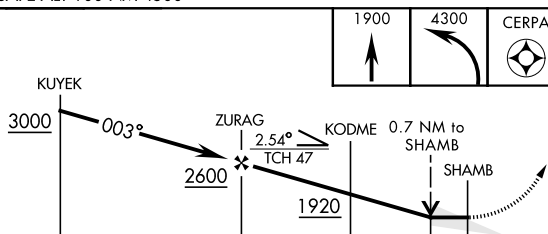

		← 2.4 NM →		← 1.7 NM →		← 0.5 NM →	
CATEGORY	A	B	C	D	E		
LNAV MDA *	1660 - 34 353 (400 - 34)						
CIRCLING	1760-1 453 (500-1)		1800-1 493 (500-1½)	1900-2 593 (600-2)	2300-3 993 (1000-3)		

