


WAAS CH 82211 W25B	APP CRS 258°	Rwy Idg TDZE 1126 Apt Elev 1135
--	------------------------	---

RNAV (GPS) Y RWY 25L
PHOENIX SKY HARBOR INTL (PHX)

RNP APCH-GPS. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase visibility LPV all Cats to 1 SM, LNAV/VNAV all Cats to 1½ SM and LNAV Cats C/D 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 1900 then climbing left turn to 5000 direct CHOCK and on track 145° to BRAAK and hold.
---	-----------	--

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)	CLNC DEL 118.1 269.2	CPDLC
--------------------------	--	---	---	--------------------------------	-------

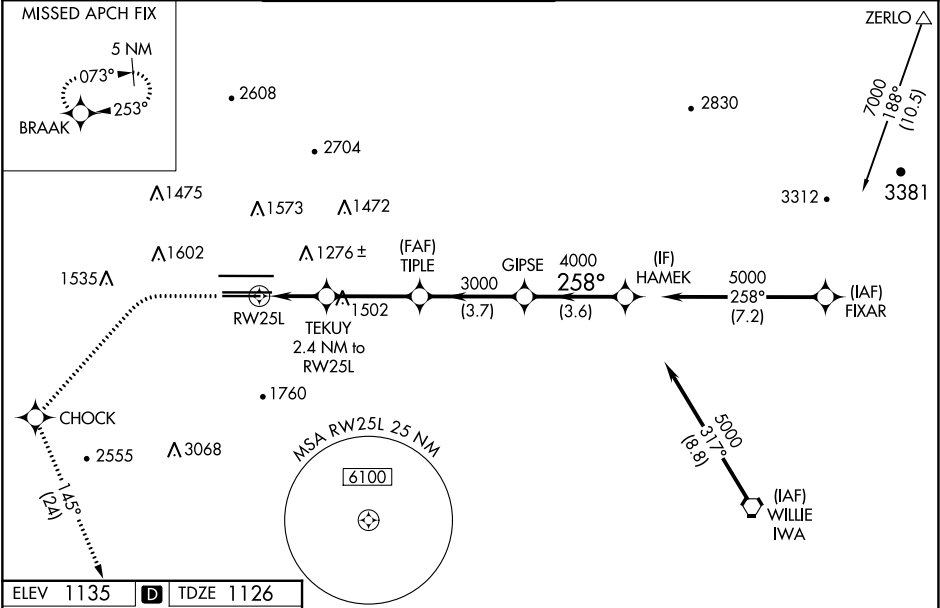

HIRL Rwy 26

1900 ↑	5000 ↘	CHOCK ⬠	fr 145°	BRAAK ⬠	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).
CATEGORY					
LPV DA		1449-½ 323 (400-½)			
LNAV/VNAV DA		1589-1 463 (500-1)			1674-1⅛ 548 (600-1⅛)
LNAV MDA		1740-½ 614 (700-½)		1740-1⅜ 614 (700-1⅜)	
CIRCLING		1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)	
				2340-3 1205 (1300-3)	

SW-4, 26 JAN 2023 to 23 FEB 2023

SW-4, 26 JAN 2023 to 23 FEB 2023