

WAAS CH 50499 W35A	APP CRS 349°	Rwy Idg 7204 TDZE 31 Apt Elev 32
--	------------------------	---

RNAV (GPS) RWY 35
WILMINGTON INTL (ILM)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cats C/D visibility to 1 3/8 SM.

A



ASR

MALSR


MISSED APPROACH:
Climb to 3000 direct
ILUXY and hold.

ATIS 124.975	WILMINGTON APP CON ★ 118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	WILMINGTON TOWER★ 119.9 (CTAF) 0 239.3	GND CON 121.9 348.6	UNICOM 122.95
-----------------	---	---	------------------------	------------------


MISSED APCH FIX

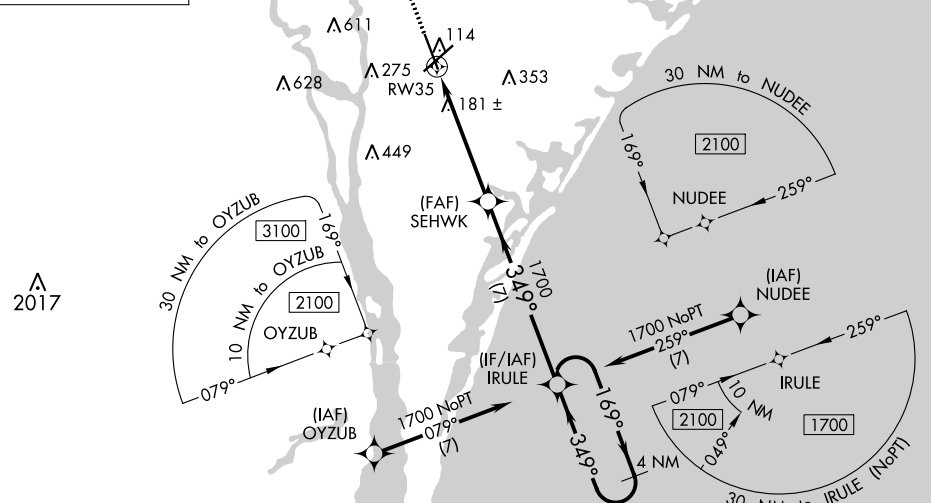

ELEV 32	D	TDZE 31
---------	----------	---------

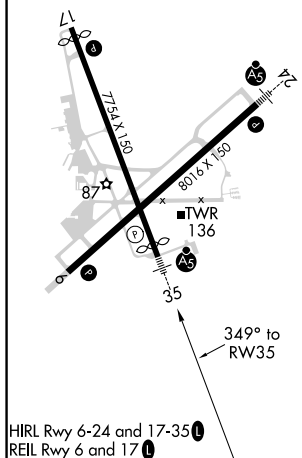

HIRL Rwy 6-24 and 17-35 **L**
REIL Rwy 6 and 17 **L**

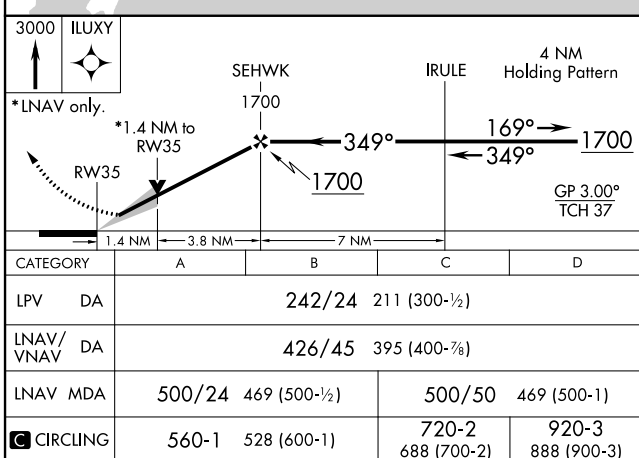

WILMINGTON, NORTH CAROLINA
Amdt 3C 17AUG17

34°16'N-77°54'W

WILMINGTON INTL (ILM)
RNAV (GPS) RWY 35