

APP CRS	Rwy Idg	11000
006°	TDZE	850
	Apt Elev	896

RNAV (RNP) Z RWY 36C

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 3000 on track 006° to LOGOZ and track 007° to NEATS and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase RNP 0.30 visibility to 1% SM.		


D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL	CPDLC
ARR	DEP				
134.375	135.3	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	121.7	127.175	

MISSED APCH FIX

NEATS

CINCINNATI TOWER

118.975 360.85 (RWY 18L/36R)
118.3 (RWYS 18C/36C, 09/27)
133.325 (RWY 18R/36L)

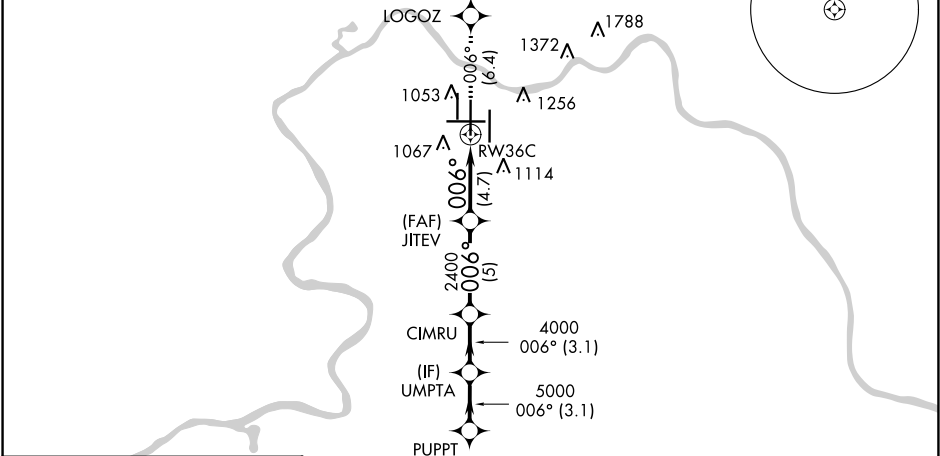

ELEV 896 **D** TDZE 850

HIRL all Rwys
TDZ/CL all Rwys except 27

Procedure NA for arrivals at FLM VOR/DME on V517 southeast bound and V57 northbound.

7000 273° (14.5) FALMOUTH FLM

Procedure NA for arrivals at DARKS on V97 southbound.

6000 006° UMPA
5000 CIMRU
4000 JITEV
2400 RW36C

GP 3.00° TCH 52

3.1 NM 3.1 NM 5 NM 4.7 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	1318/50 468 (500-1)			

AUTHORIZATION REQUIRED