


NDB FK 273	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arpt Elev 571	AL-679 [USA]	CAMPBELL AAF (KHOP)
RADAR required for procedure entry.			SSALR 	MISSED APPROACH: Climb to 1200, then climbing right turn to 2500 direct to FK LOM and hold.
* When ALS inop, increase CAT AB RVR to 50. ** Circling not authorized SE of Rwy 5-23.				
ATIS 125.175 308.4	APP CON 118.1 269.525	TOWER 120.9 278.8	GND CON 121.8 266.8	CLNC DEL 138.8
ASR/PAR				

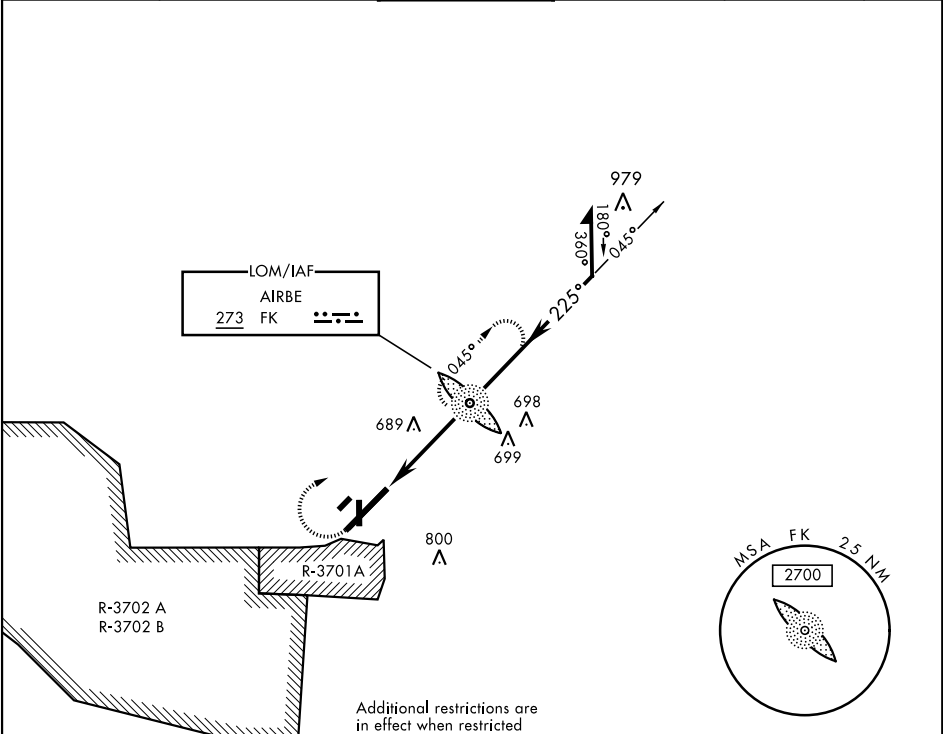

1200	2500	FK	Remain within 10 NM	
VGSI and descent angles not coincident.			NDB LOM	045°
				225°
				2100
			4.4 NM	3.17° TCH 55
CATEGORY	A	B	C	D
S-23*	1120/40	549 (600-3/4)	1120/60	549 (600-1)
** CIRCULING	1120-1	549 (600-1)	1120-1 5/8 549 (600-1 1/8)	1140-2 569 (600-2)
FAF to MAP 4.4 NM				
HIRL all Rwy				
Knots				
Min:Sec				

SE-1, 26 JAN 2023 to 23 FEB 2023

SE-1, 26 JAN 2023 to 23 FEB 2023