

WAAS CH 86530 W35B	APP CRS 356°	Rwy Idg TDZE Apt Elev	8301 36 36
--	------------------------	-----------------------------	---------------------------------------



RNAV (GPS) Y RWY 35L

VALLEY INTL (HRL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 328 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 418 feet and all visibilities 1⁄8 SM; increase all MDAs 60 feet and visibility Cats C and D 1⁄4 SM. Baro-VNAV and VDP NA with Port Isabel altimeter setting.

MISSED APPROACH:
Climb to 2000 direct ZIPIV and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

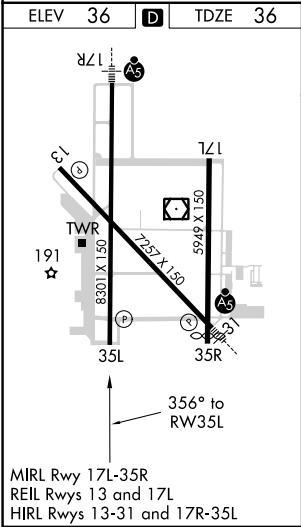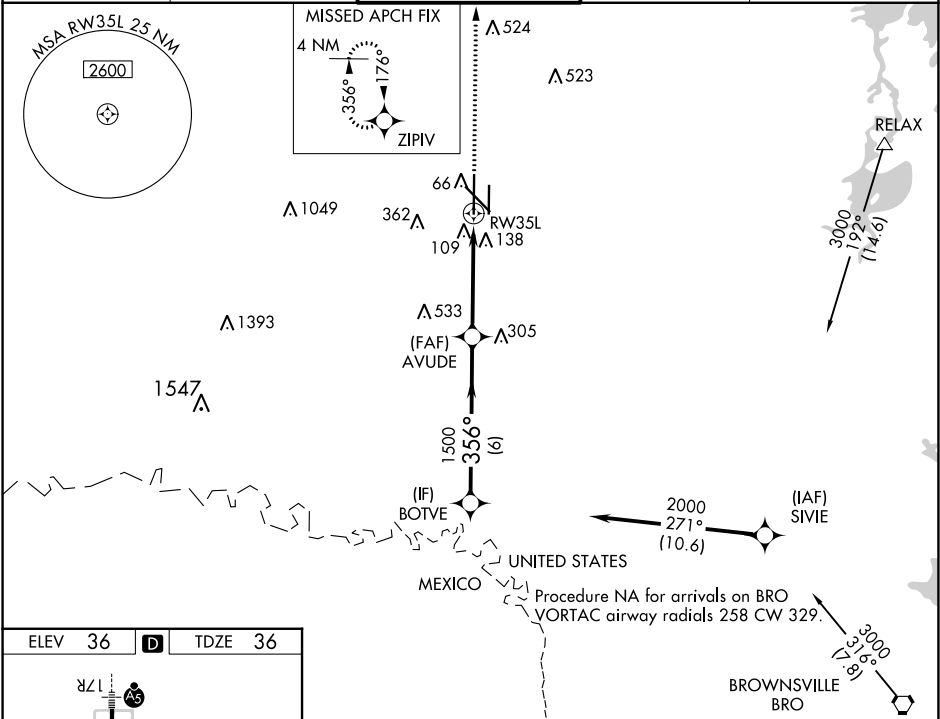

2000	ZIPIV	* LNAV only	AVUDE	BOTVE
		* 1.3 NM to RWY 35L	1500	2000
			356°	GP 3.00° TCH 59
		1.3 NM	3.1 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	286-3⁄4		250 (300-3⁄4)	
LNAV/VNAV DA	376-1 1⁄8		340 (400-1 1⁄8)	
LNAV MDA	500-1 464 (500-1)		500-1 3⁄8 464 (500-1 3⁄8)	
CIRCLING	500-1 464 (500-1)	560-1 524 (600-1)	680-1 3⁄4 644 (700-1 3⁄4)	680-2 644 (700-2)