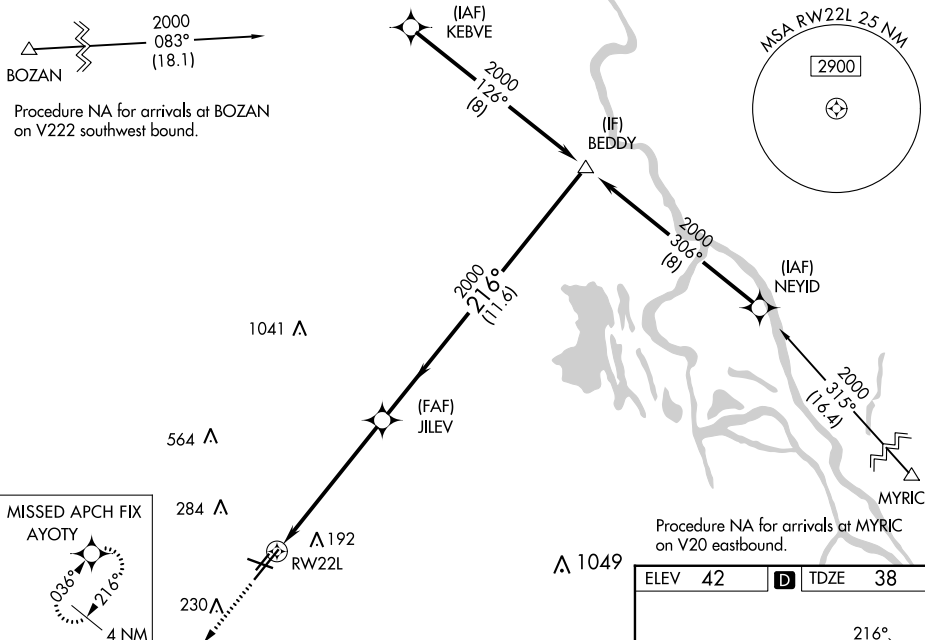


RNAV (GPS) RWY 22L

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). VDP NA with Acadiana Rgnl altimeter setting. When local altimeter setting not received use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats to RVR 3500, increase Circling visibility Cat C/D ¼ SM. For inop MALSR, increase LNAV Cats C and D visibility ½ mile. For inop MALSR, when using Acadiana Rgnl altimeter setting, increase LNAV/VNAV all Cats visibility to RVR 6000. Baro-VNAV NA when using Acadiana Rgnl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
AYOTY and hold.

UNICOM
122.95[illegible]

CATEGORY	A	B	C	D
LPV DA	238/24 200 (200-½)			
LNAV/ VNAV DA	349/24 311 (400-½)			
LNAV MDA	480/24 442 (500-½)	480/45 442 (500-¾)		
C CIRCLING	540-1 498 (500-1)	580-1 538 (600-1)	700-1¾ 658 (700-1¾)	700-2 658 (700-2)

