


WAAS CH 61041 W23A	APP CRS 229°	Rwy Idg 5200 TDZE 15 Apt Elev 15
--	------------------------	---

RNAV (GPS) RWY 23

LAKE CHARLES RGNL (LCH)

ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Rwy 23 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 1700 direct WINUP and hold.
-----	--	---

ATIS 118.75	LAKE CHARLES APP CON * 119.35 353.75	LAKE CHARLES TOWER * 120.7 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 126.25	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

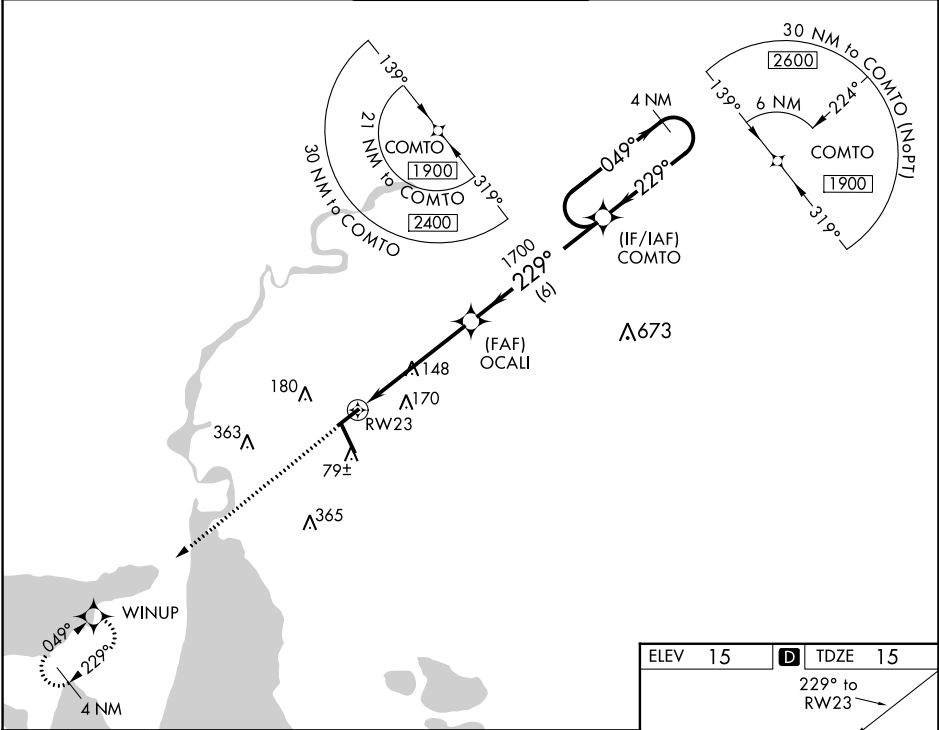

1700	WINUP	OCALI	COMTO	4 NM Holding Pattern
*LNAV only.		1700	229°	049° → 1900
		1700	← 229°	GP 3.00° TCH 47
		1.1	4 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	265-¾	250 (300-¾)		
LNAV/VNAV DA	301-⅞	286 (300-⅞)		
LNAV MDA	400-1	385 (400-1)	400-1½	385 (400-1½)
CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)

