

WAAS	APP CRS	Rwy Idg	10702
CH 65817	334°	TDZE	17
W33A		Apt Elev	17

RNAV (GPS) RWY 33

CHENNAULT INTL (CWF')

RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Lake Charles Rgnl altimeter setting.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

ASR

When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 233 feet; increase LNAV/VNAV DA to 510 feet and all visibilities ½ SM. Increase all MDAs 20 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 2000 direct CEVKU and hold.

ATIS	LAKE CHARLES APP CON ★	CHENNAULT TOWER ★	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 0 290.4	121.65 275.8	122.95

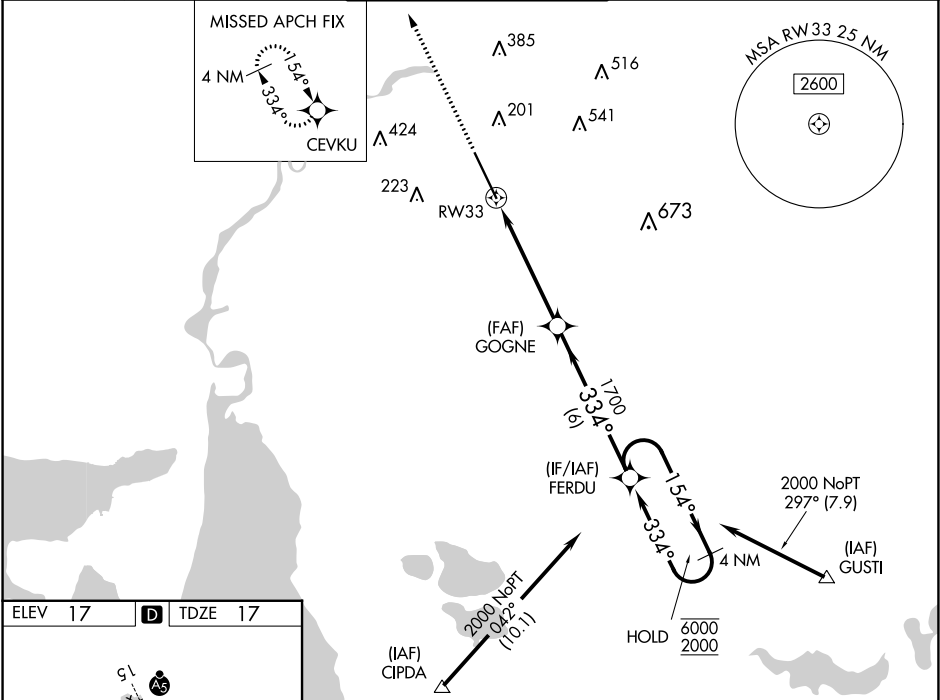

ELEV 17 D TDZE 17

REIL Rwy 33 0
HIRL Rwy 15-33 0

	2000	CEVKU							
				GOGNE		FERDU		4 NM Holding Pattern	
			1.6 NM to RW33	1700		154°		6000	
				334°		← 334°		2000	
				1700					
			1.6	3.5 NM	6 NM				
CATEGORY	A	B	C	D					
LPV DA		217-3/4	200 (200-3/4)						
LNAV/VNAV DA		494-13/4	477 (500-13/4)						
LNAV MDA	580-1	563 (600-1)	580-15/8	563 (600-15/8)					
CIRCLING	640-1	623 (700-1)	640-13/4	740-21/4					
			623 (700-13/4)	723 (800-21/4)					

SC-4, 26 JAN 2023 to 23 FEB 2023

SC-4, 26 JAN 2023 to 23 FEB 2023