
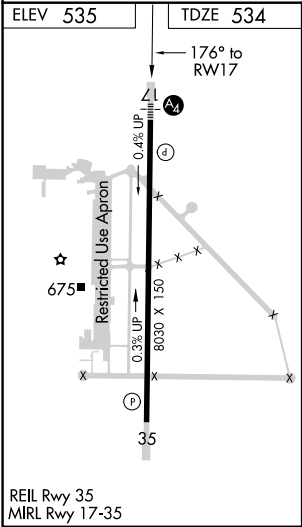


WAAS CH 86205 W17A	APP CRS 176°	Rwy Idg TDZE 534 Apt Elev 535
--	------------------------	---

RNAV (GPS) RWY 17
MAJORS (GVT)

RNP APCH.		MAJORS TOWER ★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95
Inop table does not apply to LPV and LNAV/VNAV all Cats and LNAV Cats A and B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat E visibility to 1½ SM.		MALS	MISSED APPROACH: Climb to 4000 direct VECUN and hold, continue climb-in hold to 4000.	
AWOS-3 133.425	FORT WORTH CENTER 132.025 360.75			

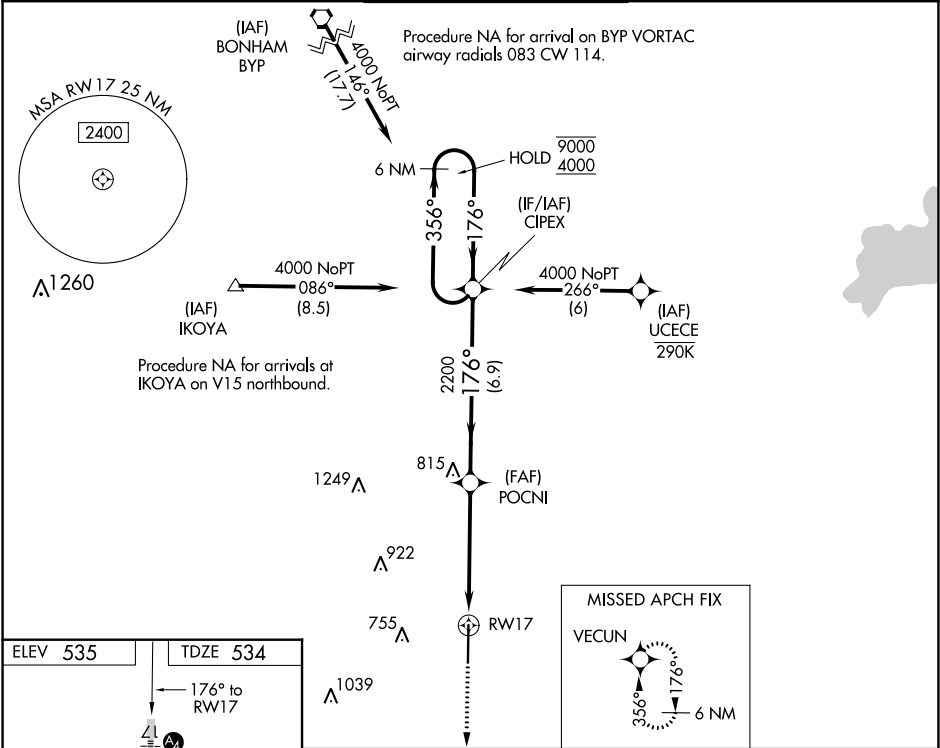

4000 VECUN		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).		6 NM Holding Pattern	
*LNAV only.		*1.5 NM to RWY17		GP 3.00° TCH 57	
RWY17		POCNI		CIPEX	
1.5 NM		3.6 NM		6.9 NM	
CATEGORY	A	B	C	D	E
LPV DA	734-1		200 (200-1)		
LNAV/VNAV DA	832-1		298 (300-1)		
LNAV MDA	1060-1 526 (600-1)		1060-1¼ 526 (600-1¼)		
CIRCLING	1060-1 525 (600-1)		1060-1½ 525 (600-1½)	1240-2¼ 705 (800-2¼)	1300-2¾ 765 (800-2¾)