

WAAS CH 61300 W29A	APP CRS 295°	Rwy Idg 5500 TDZE 619 Apt Elev 633
--	------------------------	---

RNAV (GPS) RWY 29

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
A For inop ALS, increase LNAV/VNAV visibilities to 1 3/8 SM.

MALS





MISSED APPROACH:
Climb to 2700 direct
MONTR and hold.

ASOS 121.425	CINCINNATI APP CON 121.0 254.25	CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0
------------------------	---	---------------------------	----------------------------------

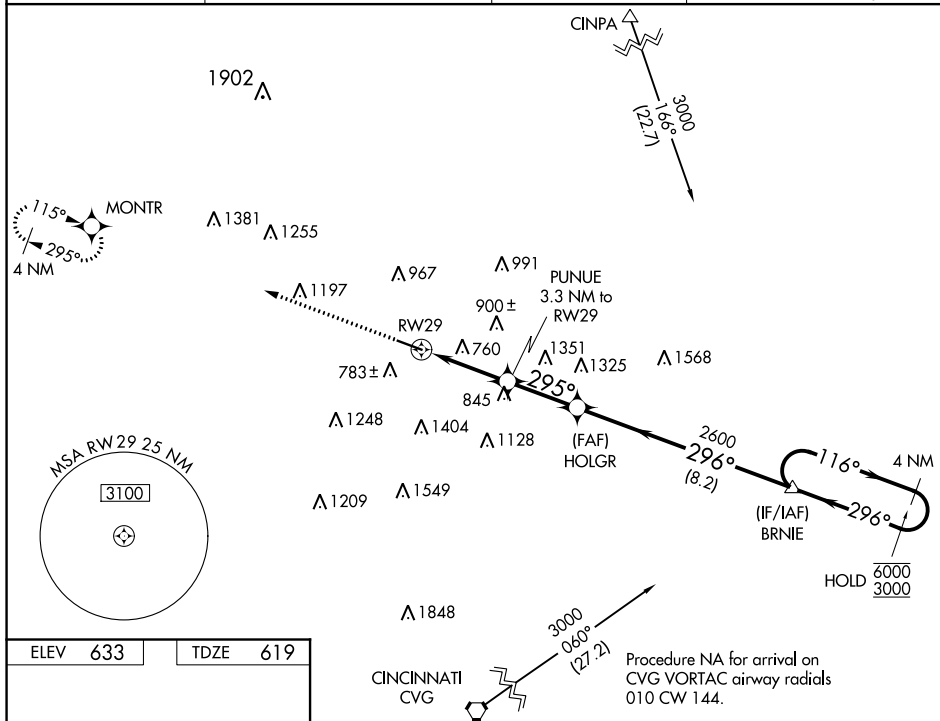

ELEV	633		TDZE	619
------	-----	--	------	-----

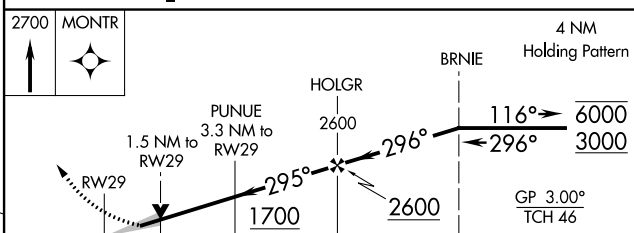

		1.5	1.8 NM	2.7 NM	8.2 NM					
CATEGORY		A		B		C		D		
LPV	DA	944-3¼					325 (400-¾)			
LNAV/ VNAV	DA	1128-1¼					509 (500-1¼)			
LNAV	MDA	1140-¾			521 (600-¾)		1140-1¼		521 (600-1¼)	
 CIRCLING		1180-1 547 (600-1)		1260-1 627 (700-1)		1320-2 687 (700-2)		1760-3 1127 (1200-3)		