
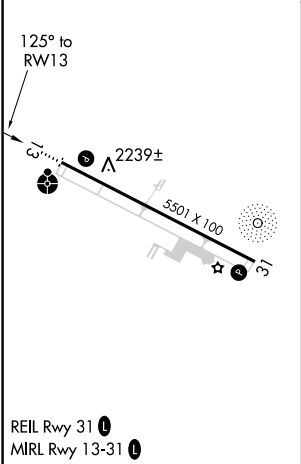


WAAS CH 86712 W13A	APP CRS 125°	Rwy Idg TDZE 2119 Apt Elev 2120
--	------------------------	---

RNAV (GPS) RWY 13

VIRGINIA TECH/MONTGOMERY EXEC (BCB)

RNP APCH. Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A and B.		ODALS 	MISSED APPROACH: Climb to 5400 direct ZASNO and hold, continue climb-in-hold to 5400.
AWOS-3 133.325	ROANOKE APP CON 126.9 339.8	CLNC DEL 124.85	UNICOM 123.05 (CTAF) 0

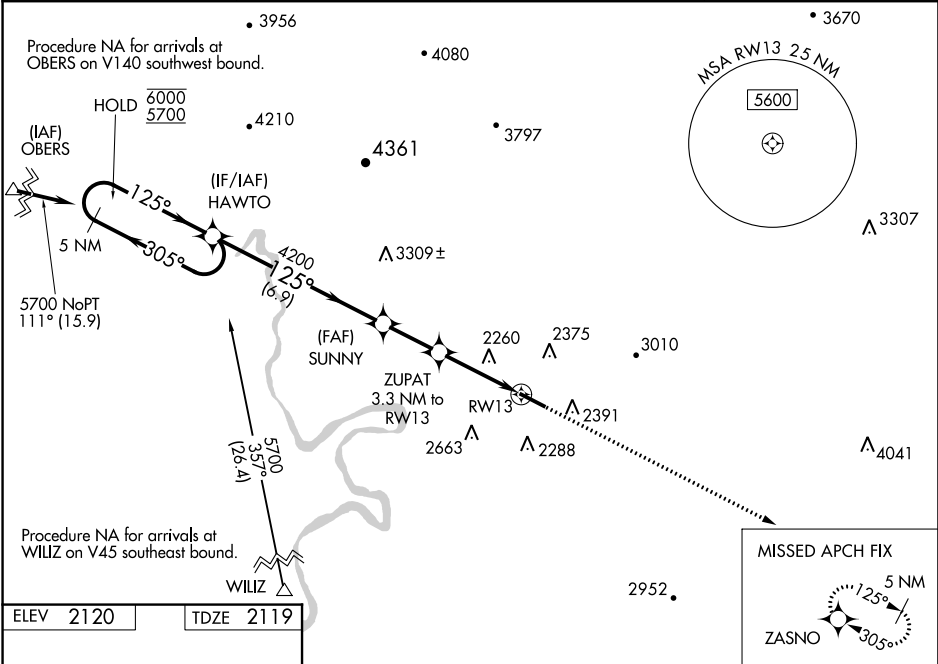

5 NM Holding Pattern HAWTO		5400 ZASNO		
GP 3.44° TCH 55		*LNAV only		
6000 5700		SUNNY 4200		
305° 125°		ZUPAT 3.3 NM to RW13		
4200		*0.9 NM to RW13		
*3380		RW13		
6.9 NM		2.2 NM		
2.4		0.9		
CATEGORY	A	B	C	D
LPV DA	2389-1	270 (300-1)		NA
LNAV/VNAV DA	2419-1	300 (300-1)		NA
LNAV MDA	2520-1	401 (400-1)		NA
CIRCLING	2760-1 640 (700-1)	2820-1 700 (700-1)	2980-2½ 860 (900-2½)	NA