


WAAS CH 40427 W25A	APP CRS 253°	Rwy Idg TDZE 730 Apt Elev 730	4153
--	------------------------	---	-------------


RNAV (GPS) RWY 25
WILLIAMS COUNTY (ØG6)

▼ Δ NA	When VGSI inop, Straight-in/Circling Rwy 25 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Defiance Meml altimeter setting; when not received, use De Kalb County altimeter setting; increase all MDAs 60 feet and LP and LNAV and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct POKLY and hold.
-------------------------	--	---

DFI ASOS 121.425	TOLEDO APP CON 134.35 307.0	UNICOM 122.8 (CTAF)	123.0 ①
----------------------------	---------------------------------------	-------------------------------	-----------------------

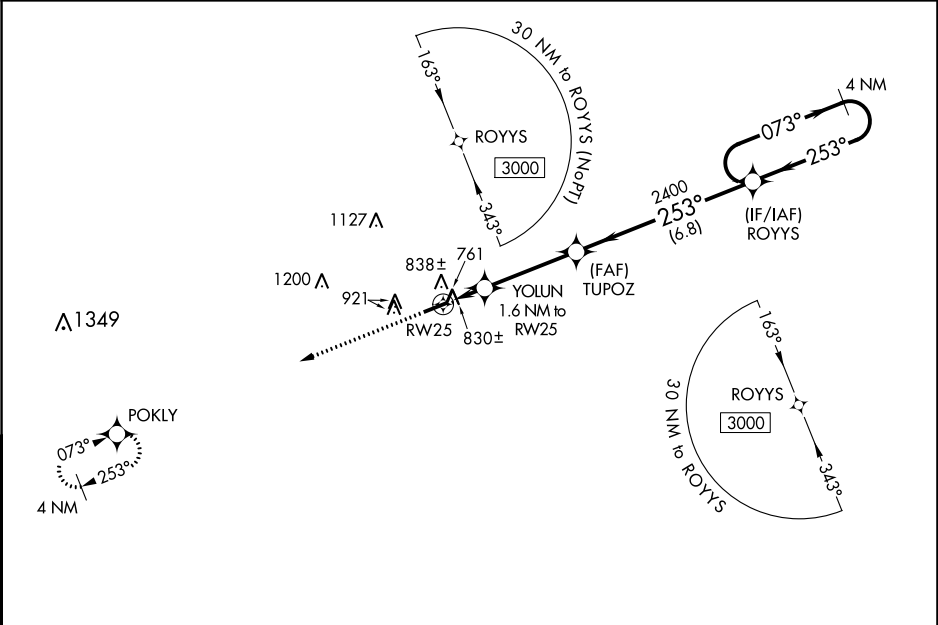

ELEV 730	TDZE 730
----------	----------

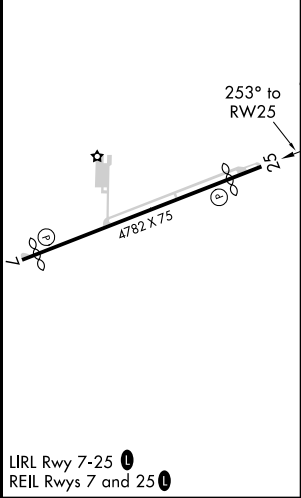

3000	POKLY	4 NM	ROYYS	Holding Pattern
YOLUN 1.6 NM to RW25	TUPOZ	2400	3000	
1.6 NM	3.5 NM	6.8 NM		
CATEGORY	A	B	C	D
LP MDA	1120-1	390 (400-1)	1120-1½	390 (400-1½)
LNAV MDA	1140-1	410 (500-1)	1140-1½	410 (500-1½)
CIRCLING	1300-1	570 (600-1)	1300-1½	1520-2½ 570 (600-1½) 790 (800-2½)