

VORTAC ISO	APP CRS	Rwy Idg	N/A
109.6	290°	TDZE	N/A
Chan 33		Apt Elev	133

VOR-A



WAYNE EXEC JETPORT (GWW)

When local altimeter setting not received, use Smithfield altimeter setting and increase all MDAs 60 feet.

DME or RADAR required.

MISSED APPROACH: Climbing right turn to 2000 on heading 050° and ISO VORTAC R-302 to ESTER INT/ISO 14.5 DME and hold.

AWOS-3P	SEYMOUR JOHNSON APP CON ★	UNICOM
118.975	121.175 290.9	122.975 (CTAF) 0

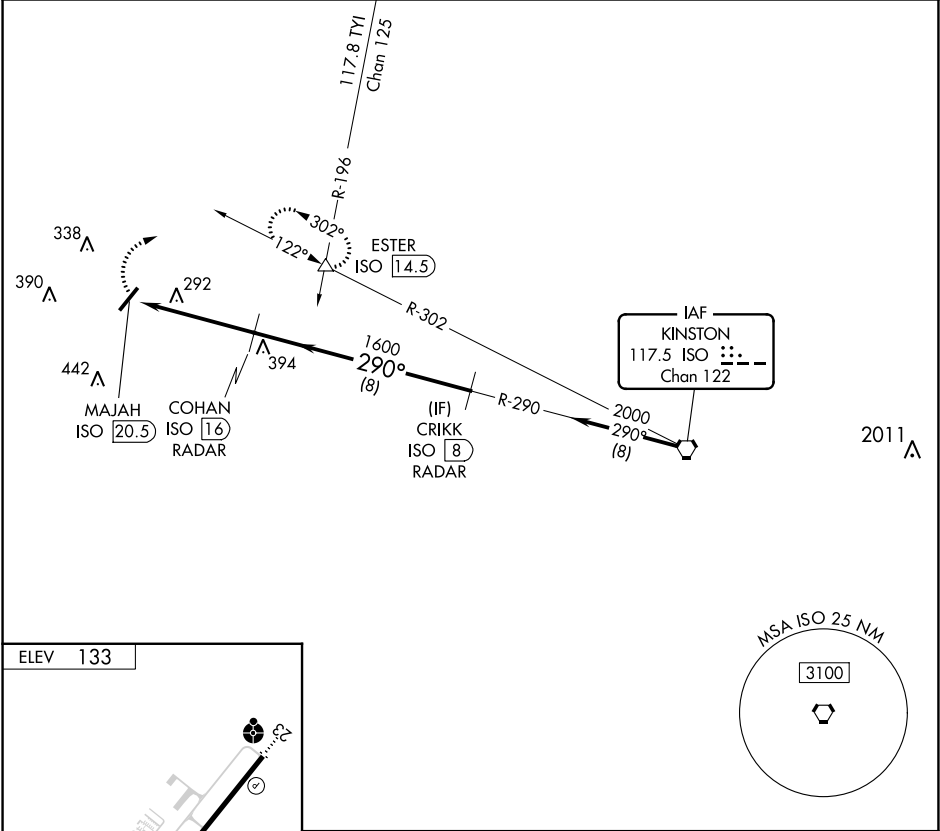

		ISO R-302	ESTER INT	CRIKK ISO 8 RADAR	
		MAJAH ISO 20.5	COHAN ISO 16 RADAR	1600	2000
		4.5 NM	8 NM		
CATEGORY	A		B	C	D
CIRCLING	620-1 487 (500-1)		640-1¼ 507 (600-1¼)	760-1¾ 627 (700-1¾)	760-2 627 (700-2)