

RNP APCH.


NA

Baro-VNAV and VDP NA when using Rocky Mount altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 2400 direct TALOE and hold, continue climb-in-hold to 2400.

WASHINGTON CENTER
123.85 279.65

UNICOM
122.8 (CTAF) 0

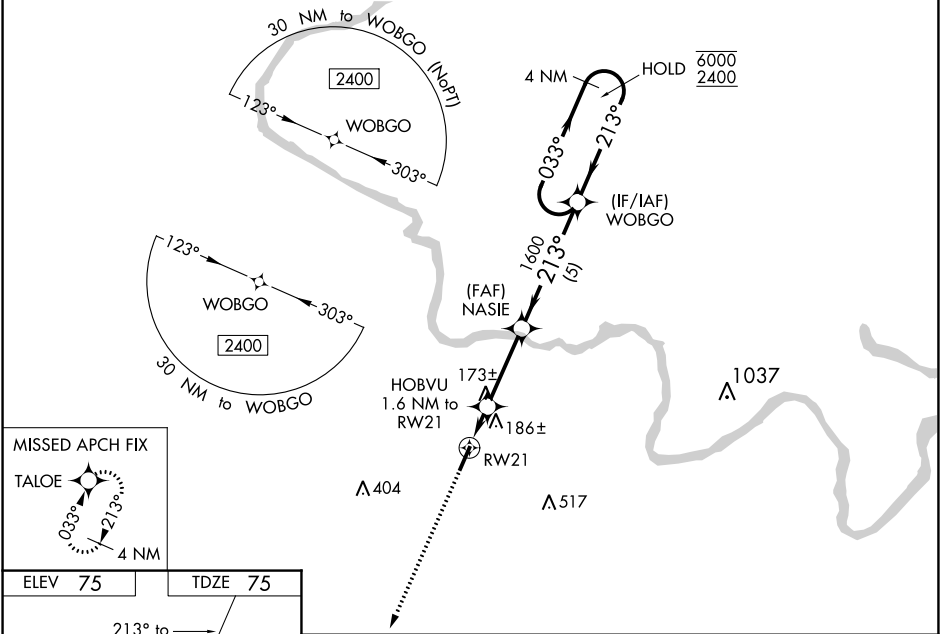

ELEV 75	TDZE 75
213° to RWY 21	213° to RWY 21
3000 X 75	3000 X 75
MIRL Rwy 3-21 0	MIRL Rwy 3-21 0
2400 TALOE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).
*LNAV only.	HOBVU 1.6 NM to RWY 21
*1.1 NM to RWY 21	NASIE 1600
1.1 0.5 3 NM 5 NM	WOBGO 4 NM Holding Pattern
033° 213° 6000 2400	GP 3.00° TCH 45
1600 640*	
1.1 0.5 3 NM 5 NM	
CATEGORY	A B C D
LPV DA	380-1 305 (400-1)
LNAV/VNAV DA	337-1 262 (300-1)
LNAV MDA	440-1 365 (400-1)
CIRCLING	500-1 540-1 680-1 880-2 425 (500-1) 465 (500-1) 605 (700-1 3/4) 805 (900-2 1/2)