

WAAS

CH **99518**

W17A

APP CRS

175°

Rwy Idg

6800

TDZE

699

Apt Elev

699

RNAV (GPS) RWY 17

DURANT RGNL/EAKER FLD (DUA)

RNP APCH.

▼


▲

Inop table does not apply to LPV and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1 ¼ SM.

ODALS

MISSED APPROACH: Climb to 2500 direct ZEGRA and hold.

AWOS-3 124.175	FORT WORTH CENTER 124.75 323.0	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------------

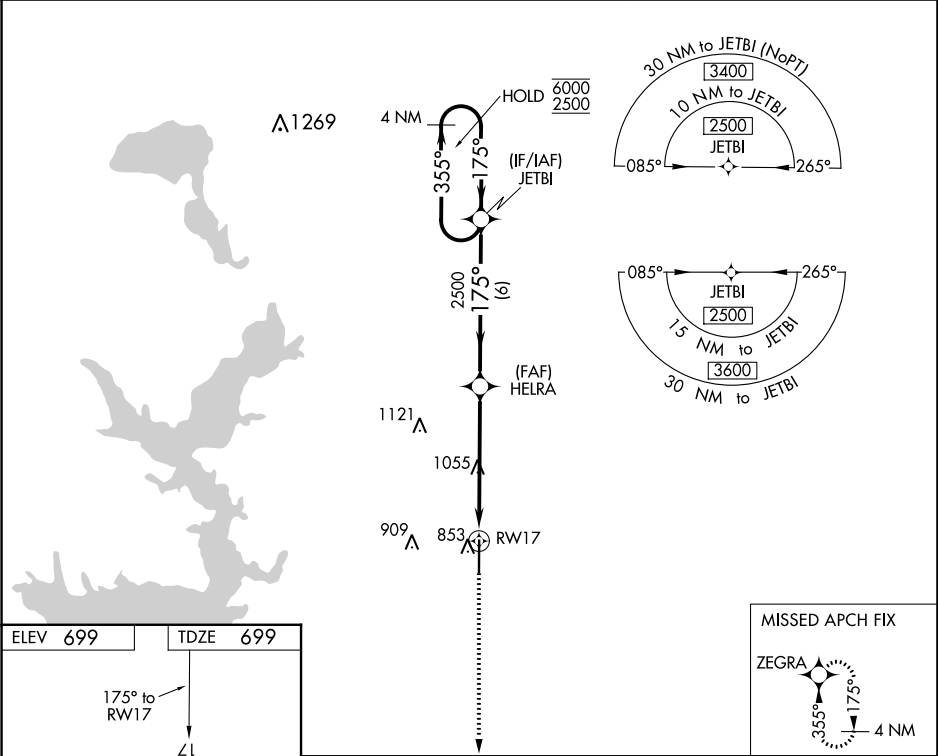

ELEV **699**

TDZE **699**

175° to RWY 17

Z1

6800 X 100

35

2500 ZEGRA

*LNAV only.

1.8 NM to RWY 17

3.7 NM

6 NM

4 NM Holding Pattern

GP 3.00° TCH 43

CATEGORY	A	B	C	D
LPV DA	899-¾	200 (200-¾)		NA
LNAV/VNAV DA	1133-1⅛	434 (500-1⅛)		NA
LNAV MDA	1320-¾	621 (700-¾)	1320-1¾ 621 (700-1¾)	NA