

VOR/DME BIS 115.65 Chan 103(Y)	APP CRS 260°	Rwy Idg TDZE Apt Elev 1944	N/A N/A 1944
--	------------------------	---	---



VOR-A

MANDAN RGNL/LAWLER FLD (Y19)

V DME or RADAR required. When local altimeter setting not received, use Bismarck altimeter setting and increase all MDA 60 feet, and Cat D visibility ¼ mile. Circling to Rwys 4 and 22 NA.
ASR

MISSED APPROACH: Climbing right turn to 3500 direct BIS VOR/DME and hold.

AWOS-3 118,225	BISMARCK APP CON ★ 126.3 298.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

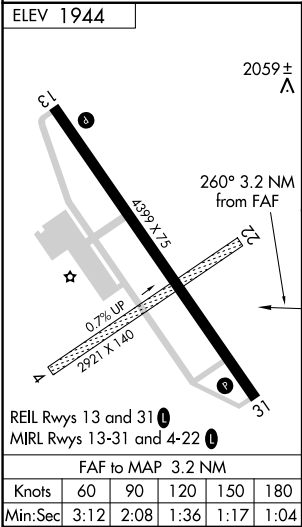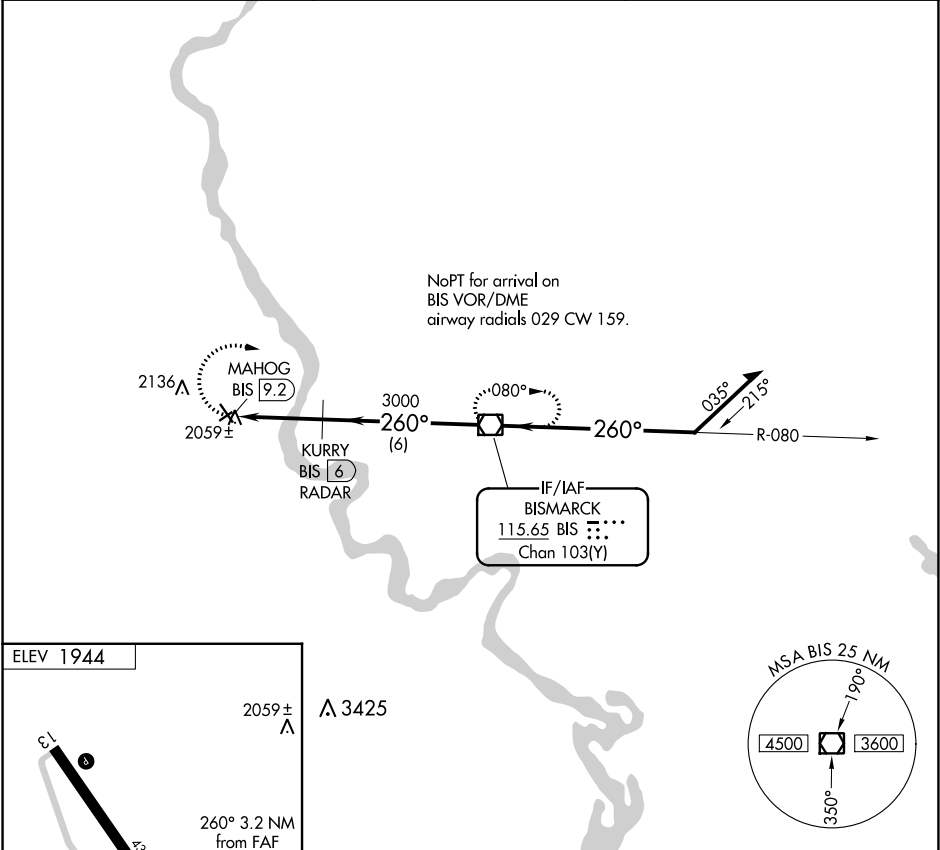

3500	BIS	KURRY BIS 6 RADAR	BIS VOR/DME	Remain within 10 NM
MAHOG BIS 9.2	260°	3500	080°	260°
3000	3.2 NM	6 NM	3500	3500
CATEGORY	A	B	C	D
2360-1	2460-1	2460-1½	2560-2	
416 (500-1)	516 (600-1)	516 (600-1½)	616 (700-2)	
CIRCLING				