

LOC I-AFA 111.3	APP CRS 275°	Rwy Idg 27R TDZE 985 Apt Elev 1026	27L 8865 999 1026
ILS or LOC RWY 27R			
HARTSFIELD-JACKSON ATLANTA INTL (ATL)			

RADAR required for procedure entry.
DME or RADAR required.


Simultaneous approach authorized. Inop table does not apply to S-ILS 27R all Cats. For inop ALS, increase S-LOC 27R Cats A and B visibility to RVR 5500.

Rwy 27R
MAL S

Rwy 27L
ALS F-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					ALL RWYS 121.9	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS 121.75 121.65 254.4	ALL RWYS 254.4
------------------------------------	-----------------------------------	---	--	--	--	--	----------------------	--	----------------------

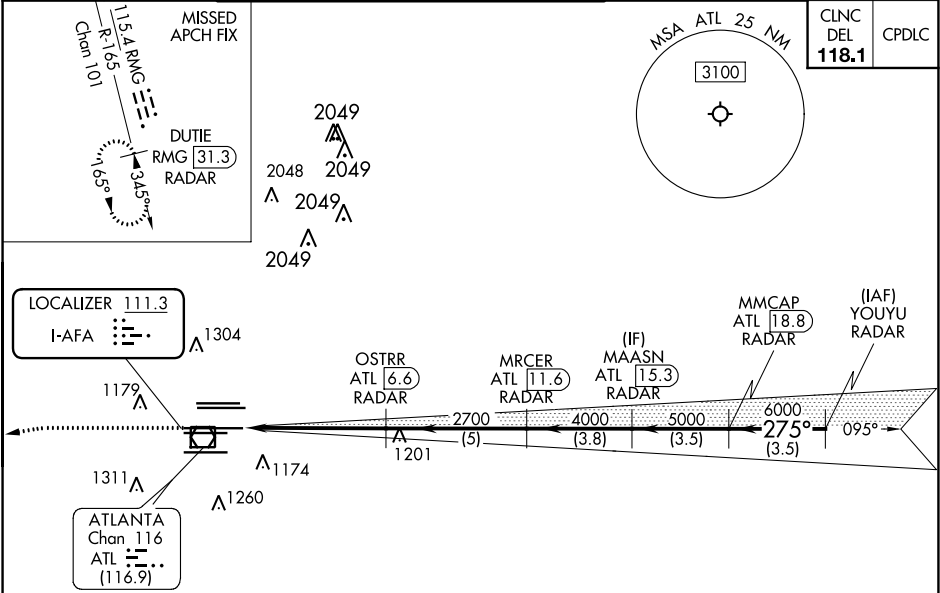

ELEV 1026	D	TDZE 27R 985 TDZE 27L 999
0.6% DOWN → X 150 0.3% DOWN → X 150 0.5% DOWN 0.4% UP 0.5% UP 0.4% UP 0		