


TACAN RWY 25

TACAN LRF Chan 29	APCH CRS 257°	Rwy Idg 12,000 TDZE 300 Arprt Elev 312	AL-738 [USAF]	LITTLE ROCK AFB (KLRF)
RADAR required when R-2403A / R2403B active. ▼ * When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile; CAT CDE vis to 1½ miles. ** Circling not authorized south of airfield.			ALSF-2 	MISSED APPROACH: Climb to 1300 then turn right climbing to 3000, intercept LRF TACAN R-340 to 13 DME (HERCK) and hold.


ATIS ★	APP CON	TOWER	GND CON	CLNC DEL
119.175 251.1	119.5 306.2	120.6 269.075	132.8 275.8	253.5

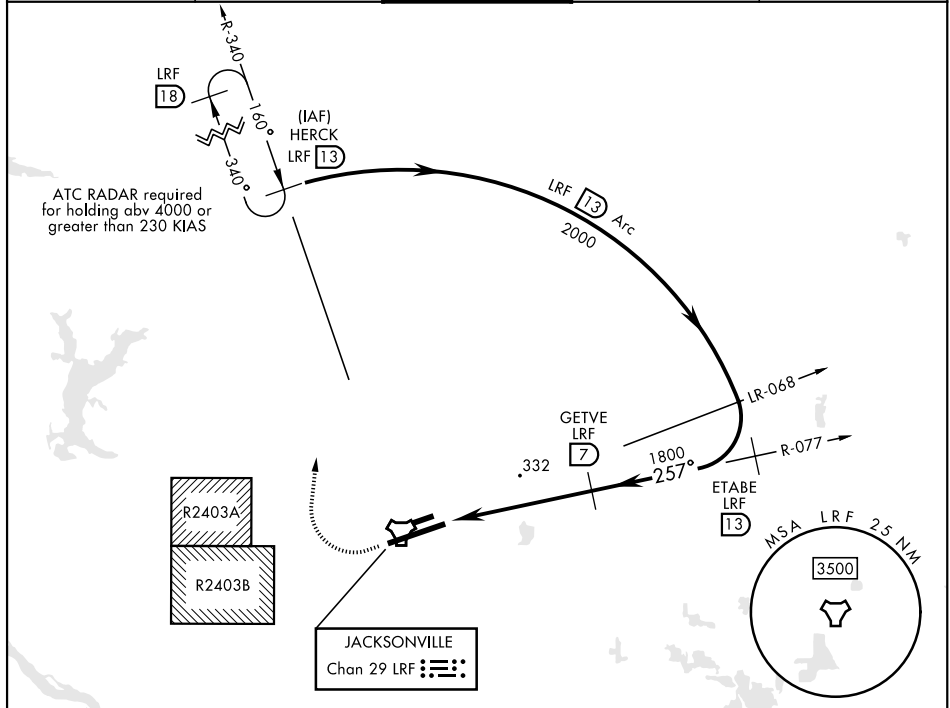


SC-1, 23 FEB 2023 to 23 MAR 2023

SC-1, 23 FEB 2023 to 23 MAR 2023

823 EMERG SAFE ALT 100 NM 4100

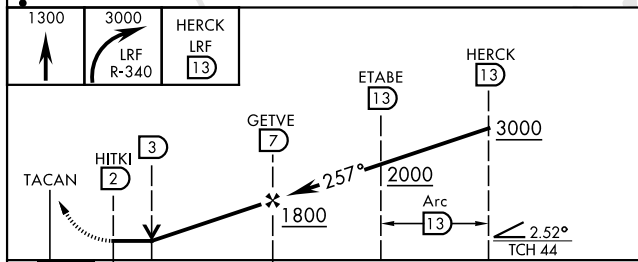

CATEGORY	A	B	C	D	E
S-25 *	800/24	500 (500-½)	800/50	500	(500-1)
C CIRCLING **	800-1 488 (500-1)	920-1 608 (700-1)	920-1¾ 608 (700-1¾)	1040-2¼ 728 (800-2¼)	1040-2½ 728 (800-2½)

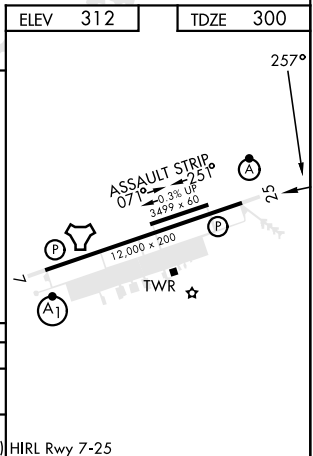

JACKSONVILLE, ARKANSAS

34°55'N-92°09'W

LITTLE ROCK AFB (KLRF)

Amdt 7 14JUL22

TACAN RWY 25