

WAAS
CH **69401**
W17A

APP CRS
175°

Rwy Idg
TDZE **541**
Apt Elev **548**

RNAV (GPS) RWY 17

COX FLD (PRX)

▼

▲


DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Sulphur Springs altimeter setting and increase LPV DA to 868 feet, LNAV/VNAV DA to 923 feet, and all MDAs 80 feet; increase Circling Cats C/D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (118°F). Baro-VNAV NA when using Sulphur Springs altimeter setting.

MISSED APPROACH:
Climb to 2200 direct
CUKBO and hold.

AWOS-3PT
119.675

FORT WORTH CENTER
124.875

UNICOM
122.975 (CTAF) 0

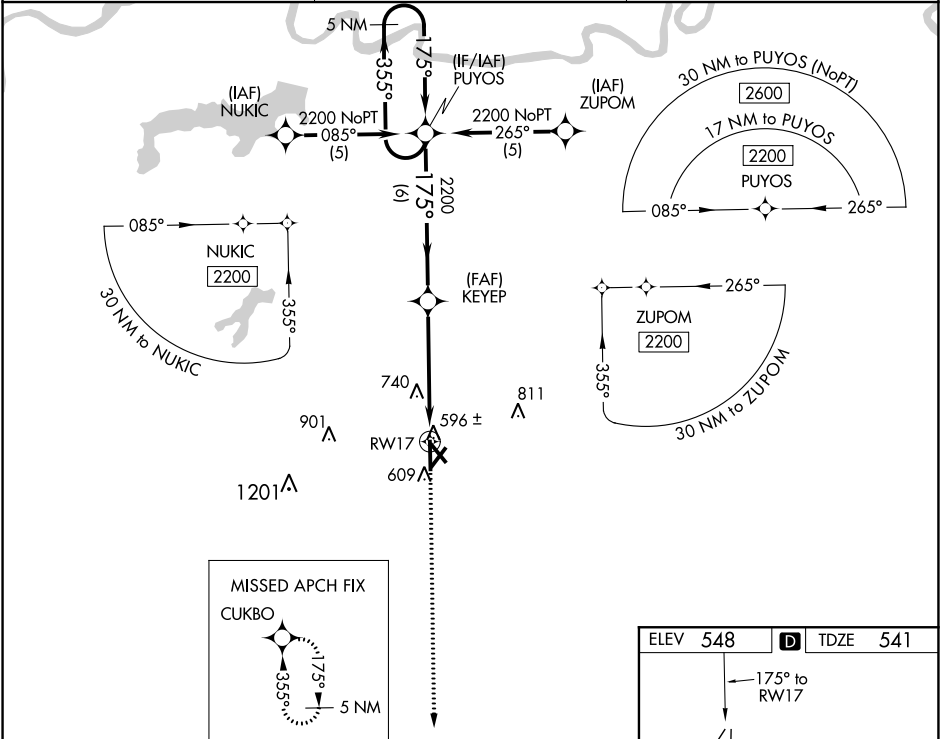

5 NM Holding Pattern

PUYOS

KEYEP

2200

GP 3.00° TCH 40

6 NM

5 NM

RW17

CUKBO

CATEGORY	A	B	C	D
LPV DA	791-1 250 (300-1)			
LNAV/VNAV DA	846-1 305 (300-1)			
LNAV MDA	1040-1 499 (500-1)	1040-1¼ 499 (500-1¼)	1040-1½ 499 (500-1½)	
CIRCLING	1040-1 492 (500-1)	1060-1 512 (600-1)	1100-1½ 552 (600-1½)	1220-2¼ 672 (700-2¼)

ELEV 548

TDZE 541

175° to RW17

41

4624 X 150

6002 X 100

584

35

32

0.3% Up

MIRL Rwy 17-35 0