

WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---



RNAV (GPS) RWY 19
H L SONNY CALLAHAN (CQF)

T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).

A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

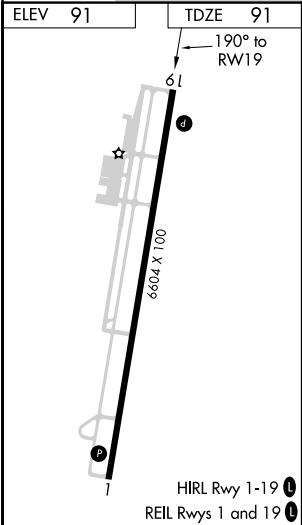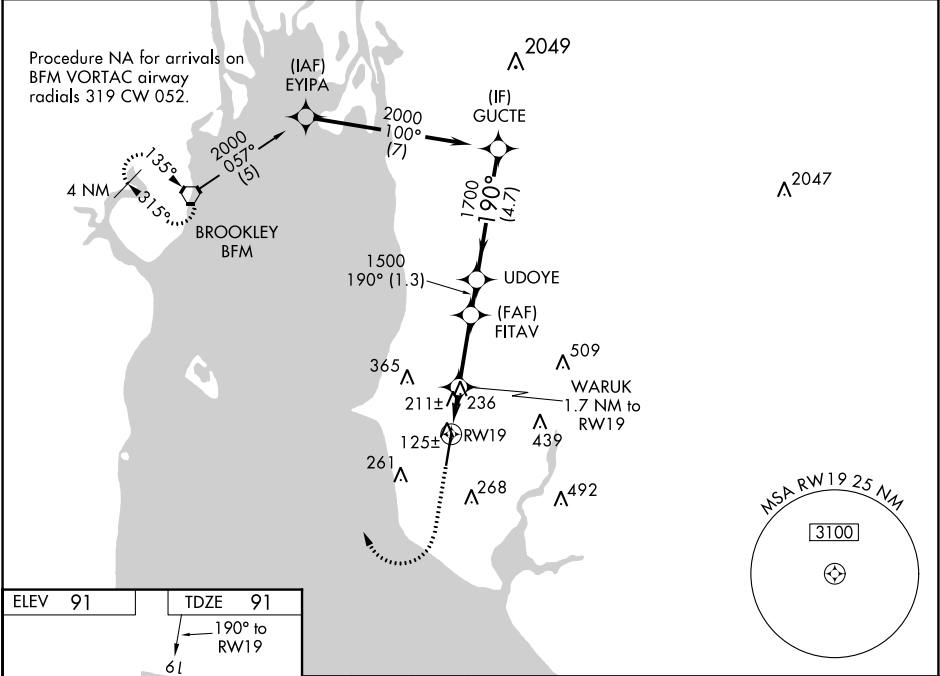

1500	2000	BFM		
*LNAV only.		WARUK 1.7 NM to RW19	FITAV 1500	UDOYE 1700
1.2 NM to RW19		660	1500	2000
1.2		0.5	2.6	1.3
4.7				
CATEGORY	A	B	C	D
LPV DA	341-7/8 250 (300-7/8)			
LNAV/VNAV DA	513-1 1/2 422 (500-1 1/2)			
LNAV MDA	500-1	409 (500-1)	500-1 1/8	409 (500-1 1/8)
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1 3/4 629 (700-1 3/4)	740-2 649 (700-2)

SE-4, 23 FEB 2023 to 23 MAR 2023

SE-4, 23 FEB 2023 to 23 MAR 2023