


WAAS CH 7750B W35A	APP CRS 352°	Rwy Idg 5003 TDZE 199 Apt Elev 200
--	------------------------	---

RNAV (GPS) RWY 35

AURORA STATE (UAO)

RNP APCH.	MISSED APPROACH: Climb to 2500 direct LUTZZ and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. Rwy 35 helicopter visibility reduction below ¾ SM NA.	

ATIS ★ 118.525	PORTLAND APP CON 126.0 269.175	AURORA TOWER ★ 120.35 (CTAF)	GND CON 119.15	CLNC DEL 119.15	PORTLAND CLNC DEL 119.95 (When tower closed)
--------------------------	--	--	--------------------------	---------------------------	---

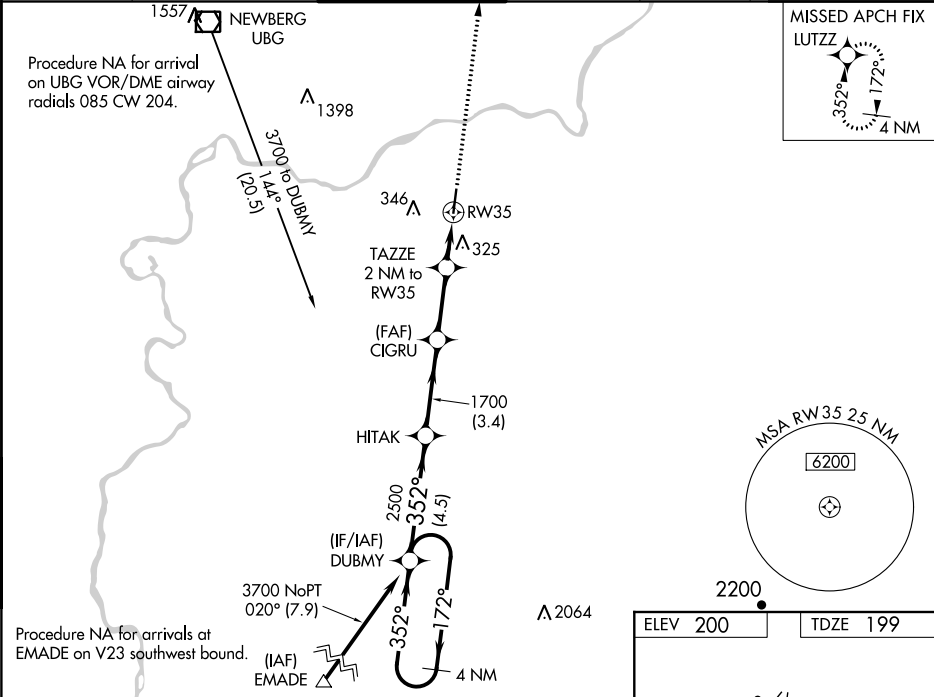

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25 /TCH 51).						2500	LUTZZ
4 NM Holding Pattern							
GP 3.00° TCH 40							
CATEGORY	A		B		C	D	
LPV DA	453-7/8 254 (300-7/8)						
LNAV/ VNAV DA	515-1 316 (400-1)						
LNAV MDA	620-1 421 (500-1)			620-1 1/4 421 (500-1 1/4)			
CIRCLING	700-1 500 (500-1)			700-1 1/2 940-2 1/4 500 (500-1 1/2)		740 (800-2 1/4)	

