



RNP APCH.

▼ Rwy 36 helicopter visibility reduction below ¾ SM NA.

▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct GOMRR and hold.

AWOS-3 121.125	GREENSBORO APP CON 124.35 269.225	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

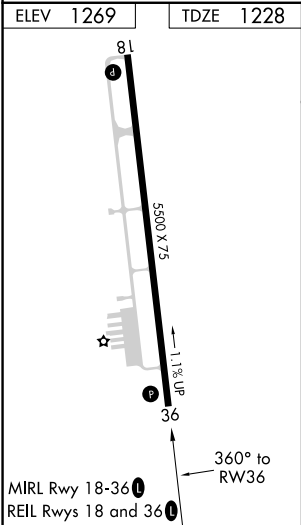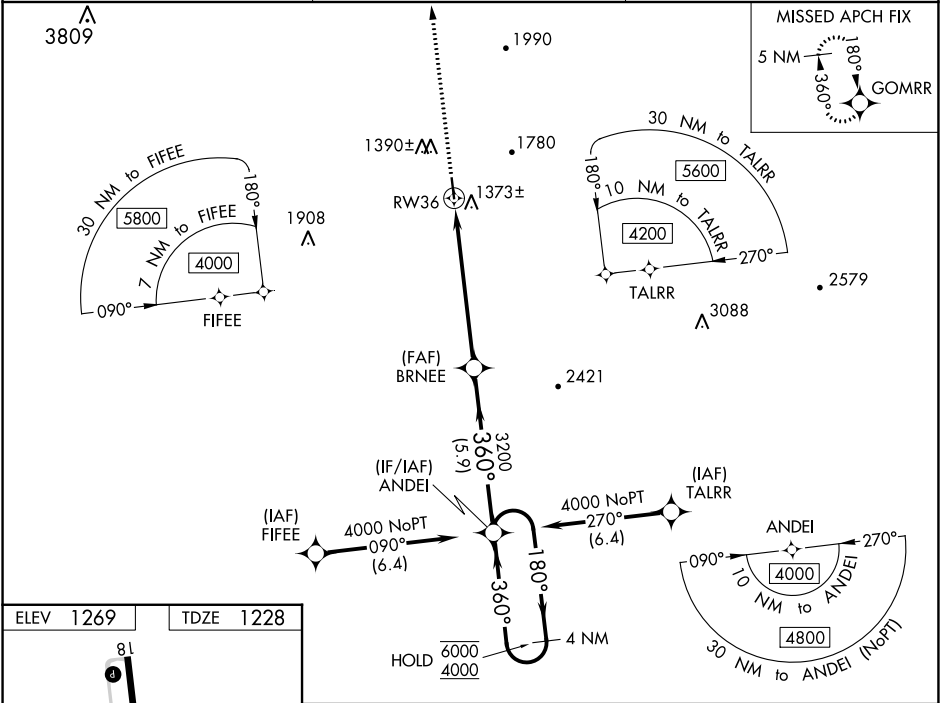

5000 ↑ GOMRR ✦	BRNEE 3200 ANDEI 4 NM Holding Pattern 180° → 6000 ← 360° 4000 GP 3.00° TCH 40 1.2 NM 4.9 NM 5.9 NM			
*LNAV only.	*1.2 NM to RW36			
CATEGORY	A	B	C	D
LPV DA	1527-1 299 (300-1)			
LNAV/VNAV DA	1637-1½ 409 (400-1½)			
LNAV MDA	1640-1 412 (400-1)	1640-1½ 412 (400-1½)		
CIRCLING	1940-1 671 (700-1)	2040-1 771 (800-1)	2180-2¾ 911 (1000-2¾)	2340-3 1071 (1100-3)