

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>45517</b><br><b>W28A</b> | APP CRS<br><b>281°</b> | Rwy Idg<br>TDZE <b>413</b><br>Apt Elev <b>421</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) Z RWY 28  
SYRACUSE HANCOCK INTL (SYR)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-6°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV Cats C/D visibility to 1½ mile.

**ALSF-2**

**A**

**MISSED APPROACH:** Climb to 3000 direct SOLVA and on track 295° to WIFFY and hold.

|                        |                                            |                                      |                               |                                   |
|------------------------|--------------------------------------------|--------------------------------------|-------------------------------|-----------------------------------|
| ATIS<br><b>124.225</b> | SYRACUSE APP CON<br><b>126.125 269.125</b> | SYRACUSE TOWER<br><b>120.3 239.0</b> | GND CON<br><b>121.7 348.6</b> | CLNC DEL<br><b>125.05 257.775</b> |
|------------------------|--------------------------------------------|--------------------------------------|-------------------------------|-----------------------------------|

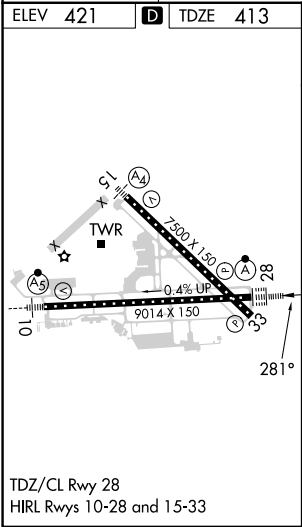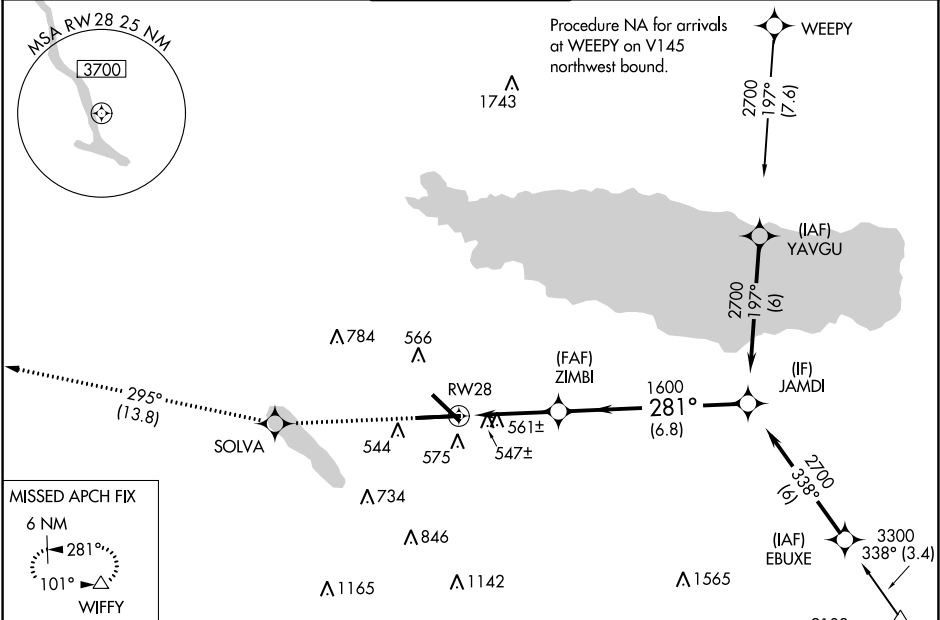

| CATEGORY     | A                    | B                    | C                       | D                       |
|--------------|----------------------|----------------------|-------------------------|-------------------------|
| LPV DA       | 613/18 200 (200-½)   |                      |                         |                         |
| LNAV/VNAV DA | 850/50 437 (500-1)   |                      |                         |                         |
| LNAV MDA     | 820/24               | 407 (400-½)          | 820/40                  | 407 (400-¾)             |
| CIRCLING     | 900-1<br>479 (500-1) | 920-1<br>499 (500-1) | 1020-1½<br>599 (600-1½) | 1180-2½<br>759 (800-2½) |

NE-2, 23 MAR 2023 to 20 APR 2023

NE-2, 23 MAR 2023 to 20 APR 2023