

WAAS CH 86214 W02A	APP CRS 019°	Rwy Idg TDZE 1265 Apt Elev 1268	7003
--	------------------------	---	-------------

RNAV (GPS) RWY 2
SPRINGFIELD-BRANSON NTL (SGF)


⚠ DME/DME RNP -0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F).
⚠ Baro-VNAV and VDP NA when using Monett altimeter setting.
For inoperative MALS, increase LNAV Cat A and B visibility to RVR 5000.
When local altimeter setting not received, use Monett altimeter setting and increase all DAs 90 feet and all MDAs 100 feet, increase LPV visibility all Cats to RVR 5000, LNAV/VNAV visibility all Cats to 1½ miles, LNAV visibility Cat C to RVR 5000 and Cat D to RVR 6000, and increase visibility Circling Cat C to 1¾ miles, and Cat D to 2 miles.
For inoperative MALS, when using Monett altimeter setting, increase LPV visibility all Cats to 1½, LNAV Cat A and B visibility to RVR 5000.

MALS



MISSED APPROACH: Climb to 3000 direct INOYU and hold.


ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
------------------------	--	---	--------------------------------	----------------------------

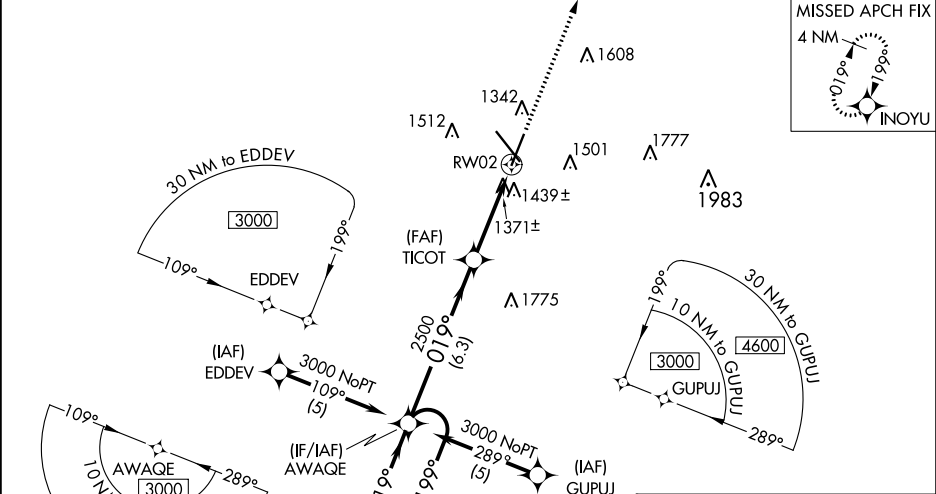

ELEV 1268	D	TDZE 1265
-----------	----------	-----------

REIL Rwy 32
HIRL Rwys 2-20 and 14-32

4 NM Holding Pattern		AWAQE		TICOT		3000 ↑ INOYU ✦	
3000 ← 199° 019° →		019°		*1.3 NM to RW02		*RNAV only	
GP 3.00° TCH 54		2500		RW02			
		6.3 NM		2.4 NM		1.3 NM	
CATEGORY	A	B	C	D			
LPV DA	1590/40		325 (400-¾)				
LNAV/ VNAV DA	1754/60		489 (500-1¼)				
LNAV MDA	1720/40		455 (500-¾)				1720/50 455 (500-1)
CIRCLING	1760-1 492 (500-1)	1820-1 552 (600-1)	1820-1½ 552 (600-1½)		1920-2 652 (700-2)		

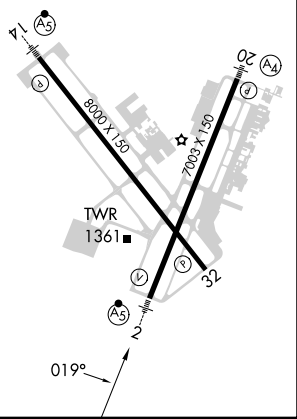

NC-3, 23 MAR 2023 to 20 APR 2023

NC-3, 23 MAR 2023 to 20 APR 2023