

LOC/DME I-FLD 108.3 Chan 20	APP CRS 002°	Rwy Idg TDZE 795 Apt Elev 808	LOC RWY 36 FOND DU LAC COUNTY (F.LD)
---	------------------------	---	--

DME required. Radar required for Procedure Entry at ERAGE.



NA

Circling Rwy 9, 27 NA at night. For inop ALS, increase S-LOC 36 Cat A/B visibility to 1 SM, and Cat C/D to 1 1/2 SM. When local altimeter setting not received, use Oshkosh altimeter setting: increase all MDA 40 feet and increase Circling Cat C/D visibility 1/2 SM. VDP NA when using Oshkosh altimeter setting. For inop ALS when using Oshkosh altimeter setting, increase S-LOC 36 Cat A/B visibility to 1 SM.

MALSR

MISSED APPROACH
Climb to 2000 then climbing left turn to 3000 direct OSH VORTAC and hold.

ASOS 134.0	MILWAUKEE APP CON 127.0 263,075	UNICOM 123.05 (CTAF) 0
----------------------	---	----------------------------------

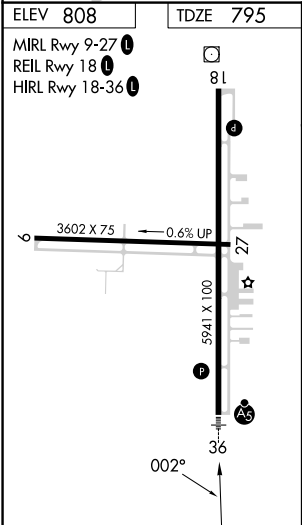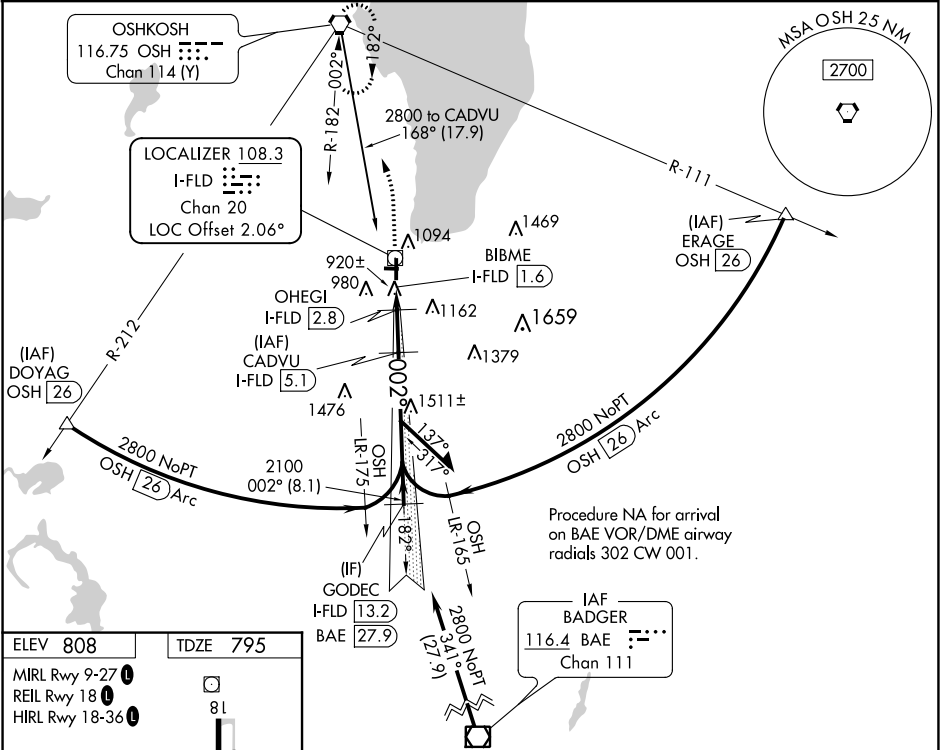

2000 3000 OSH Use I-FLD DME when on the localizer course.	CADVU I-FLD 5.1 Remain within 15 NM 182° 2800 002° 2100 *1400 using Oshkosh altimeter setting. VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 35).			
0.5 0.6 NM 0.6 NM 2.3 NM				
CATEGORY	A	B	C	D
S-LOC 36	1180-3/4 385 (400-3/4)			
CIRCLING	1400-1 592 (600-1)	1520-2 712 (800-2)	1520-2 712 (800-2 1/4)	

EC-3, 23 MAR 2023 to 20 APR 2023

EC-3, 23 MAR 2023 to 20 APR 2023