

WAAS CH 99638 W18A	APP CRS 184°	Rwy Idg TDZE 791 Apt Elev 808	RNAV (GPS) RWY 18 FOND DU LAC COUNTY (F.L.D.)
--	------------------------	---	---


⚠

⚠

Night landing: Rwy 9, 27 NA. Baro-VNAV NA when using Oshkosh altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Oshkosh altimeter setting: increase LPV DA to 1072 feet and LNAV/VNAV DA to 1314 feet and all MDA 60 feet; increase LPV visibility all Cats, LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ½ mile; increase Circling Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 1300 then climbing right turn 3000 direct BADAN and hold.

ASOS 134.0	MILWAUKEE APP CON 127.0 263.075	UNICOM 123.05 (CTAF) 0
----------------------	---	----------------------------------

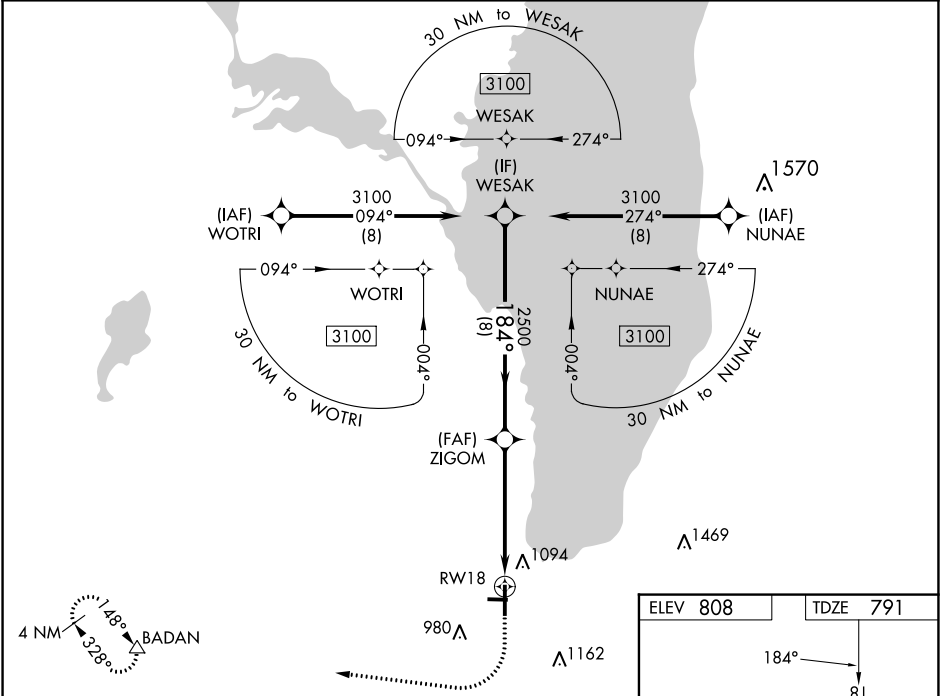

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

WESAK

ZIGOM

RWY 18

BADAN

3100

2500

184°

2500

1.6 NM to RWY 18

* LNAV only

GP 3.00°

TCH 45

8 NM

3.7 NM

1.6 NM

CATEGORY	A	B	C	D
LPV DA	1041-7/8		250 (300-7/8)	
LNAV/VNAV DA	1283-13/4		492 (500-13/4)	
LNAV MDA	1320-1 529 (600-1)		1320-1 1/2 529 (600-1 1/2)	
CIRCLING	1400-1 592 (600-1)		1520-2 712 (800-2) 1520-2 1/4 712 (800-2 1/4)	

ELEV 808

TDZE 791

184°

81

3602 X 75

0.6% UP

27

5941 X 100

36

REIL Rwy 18

MIRL Rwy 9-27

HIRL Rwy 18-36