


WAAS CH 57925 W06A	APP CRS 059°	Rwy Idg 4201 TDZE 76 Apt Elev 81
--	------------------------	---

RNAV (GPS) RWY 6
BROOKHAVEN (HWV)

	DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Isip altimeter setting and increase all DA 28 feet and all MDA 40 feet. Inoperative table does not apply to LNAV/VNAV. For inoperative MALSR, increase LPV all Cats visibility to $\frac{7}{8}$ mile, increase LNAV all Cats visibility to 1 mile. For inoperative MALSR when using Isip altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to $\frac{7}{8}$ mile, increase LNAV all Cats visibility to 1 mile. Baro-VNAV and VDP NA with Isip altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).	MALSR	MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct ISQCA and hold.
--	---	--------------	---

ASOS 119.625	NEW YORK APP CON 120.05 343.75	CLNC DEL 133.2	UNICOM 122.8 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

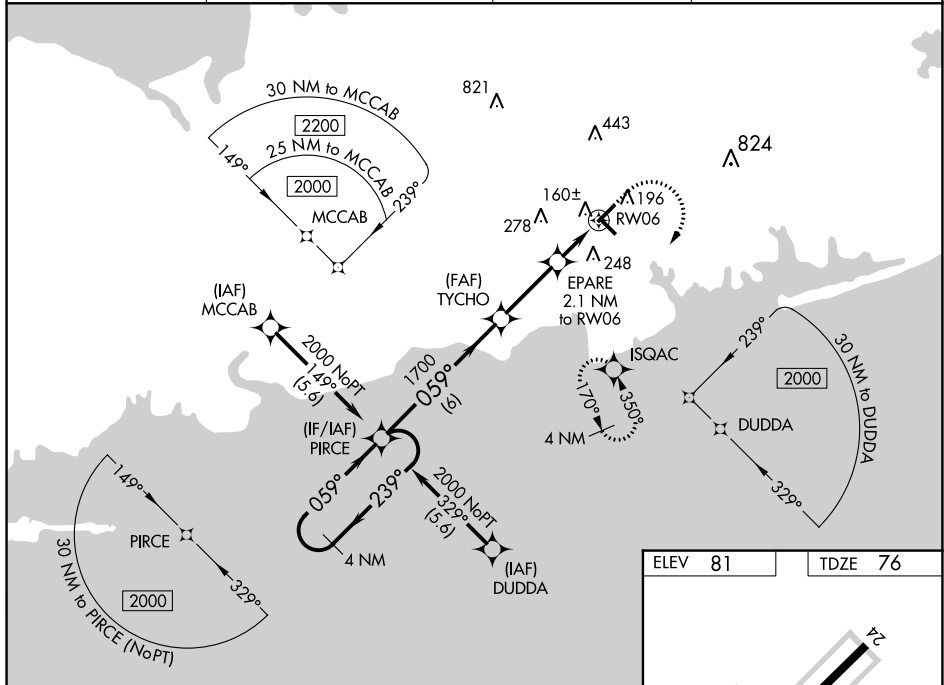

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 47).

600 2000 ISQAC

↑ ↗ ✦

EPARE 2.1 NM to RW06

*1 NM to RW06

*780

RW06

GP 3.00° TCH 51

2000 239° 059° 1700 1700

6 NM 2.9 NM 1.1 1 NM

CATEGORY	A	B	C	D
LPV DA	339- ³ / ₄	263 (300- ³ / ₄)		NA
RNAV/VNAV DA	326- ³ / ₄	250 (300- ³ / ₄)		NA
RNAV MDA	420- ³ / ₄	344 (400- ³ / ₄)		NA
CIRCLING	560-1	479 (500-1)		NA

