

LOC I-IER 110.5	APP CRS 342°	Rwy Idg 5003 TDZE 121 Apt Elev 121	LOC RWY 35 NATCHITOCHES RGNL (I-ER)
---------------------------	------------------------	---	--

▼




NA

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase all MDA 100 feet and S-35 Cat C visibility ¼ SM and Circling Cat C visibility ½ SM. For inop ODALS when using Alexandria Intl altimeter setting, increase S-35 Cat C visibility ⅓ mile. Inop table does not apply to S-35 Cat A/B. ADF required.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OOC NDB and hold.

AWOS-3 119.025	POLK APP CON 125.4 302.2	GCO 135.075	UNICOM 122.8(CTAF) 0
--------------------------	------------------------------------	-----------------------	--------------------------------

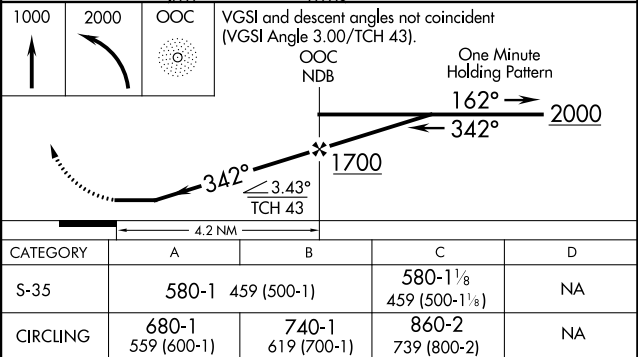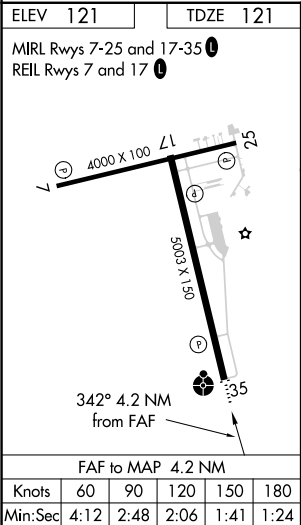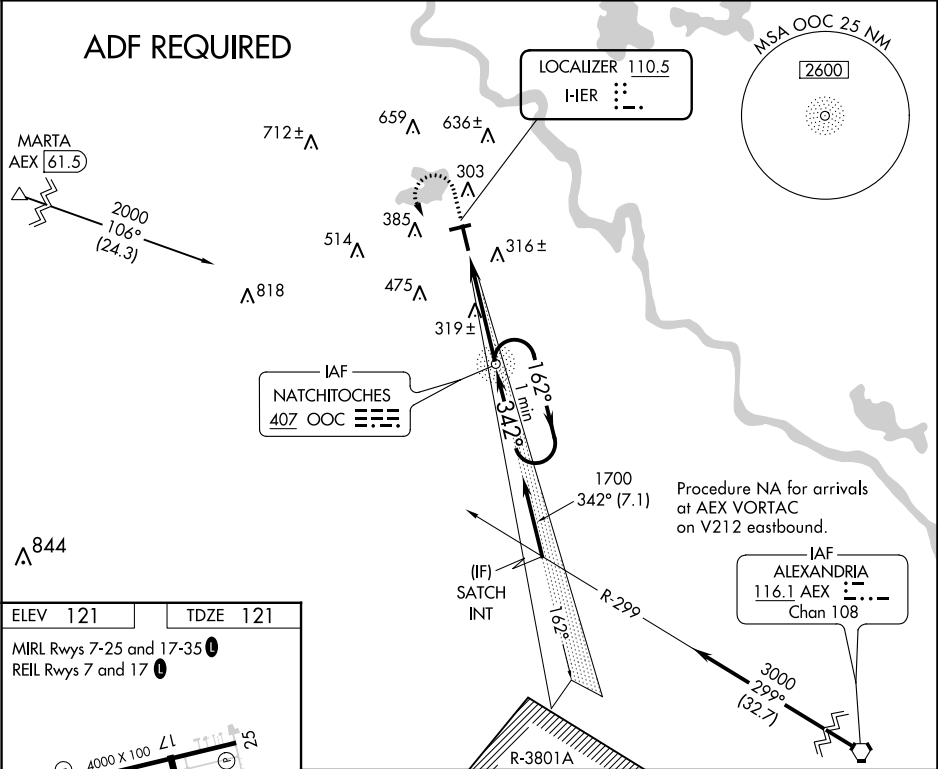

SC-4, 23 MAR 2023 to 20 APR 2023

SC-4, 23 MAR 2023 to 20 APR 2023