

WAAS CH 61220 W05A	APP CRS 047°	Rwy Idg 10004 TDZE 952 Apt Elev 952
--	------------------------	--

RNAV (GPS) RWY 5L

BATTLE CREEK EXEC AT KELLOGG FLD (BTL)

RNP APCH


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 37°C.
Rwy 5L helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Grand Rapids altimeter setting: increase all DAs 106 feet and all visibilities ¾ SM; increase all MDAs 120 feet and increase LNAV Cats C and D visibility ¾ SM and Circling Cat C visibility ½ SM and Cat D visibility ¼ SM. VDP and Baro-VNAV NA when using Grand Rapids altimeter setting. Circling Rwy 31 NA at night. Circling NA to Rwys 5R and 23L.

MISSED APPROACH:
Climb to 2500 direct
WIPIL and hold.

ATIS 128.325	GREAT LAKES APP CON★ 119.2 239.25	BATTLE CREEK TOWER★ 126.825 (CTAF)	GND CON 121.7	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

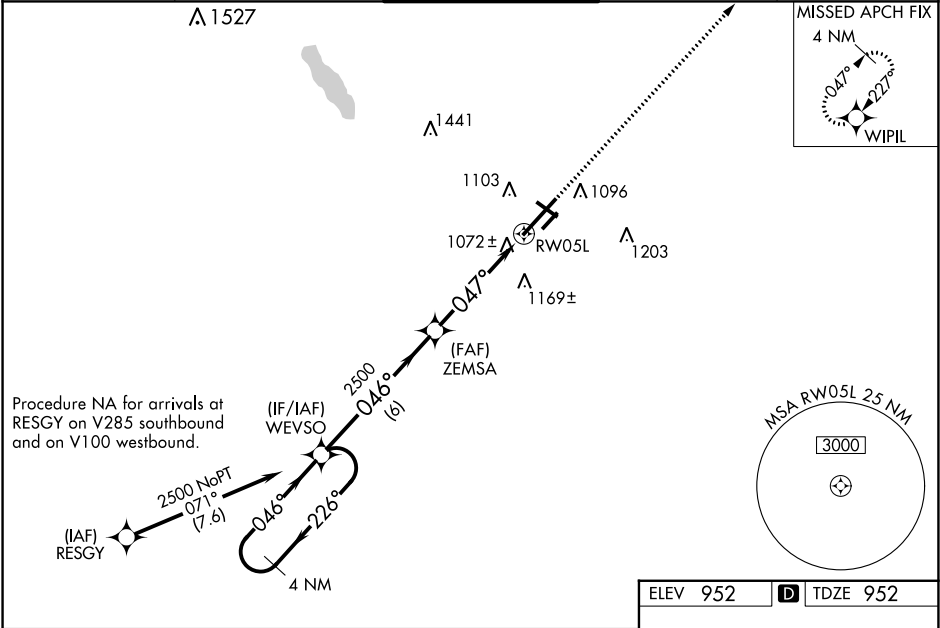

4 NM Holding Pattern		WEVSO	ZEMSA	2500	WIPIL
2500 ← 226° 046° →		046°	047°	2500	
GP 3.00° TCH 48					
		6 NM	3.3 NM	1.4	
CATEGORY	A	B	C	D	
LPV DA	1317-1¼		365 (400-1¼)		
LNAV/VNAV DA	1253-1		301 (400-1)		
LNAV MDA	1440-1	488 (500-1)	1440-1¾	488 (500-1¾)	
CIRCLING	1440-1 488 (500-1)	1480-1 528 (600-1)	1520-1½ 568 (600-1½)	1520-2 568 (600-2)	

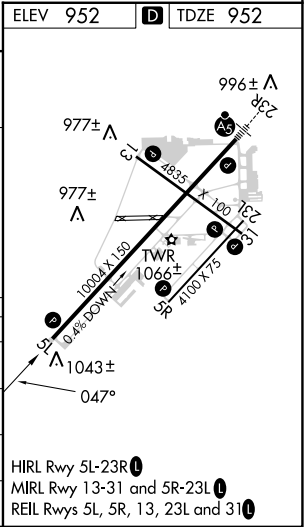

EC-1, 18 MAY 2023 to 15 JUN 2023

EC-1, 18 MAY 2023 to 15 JUN 2023