
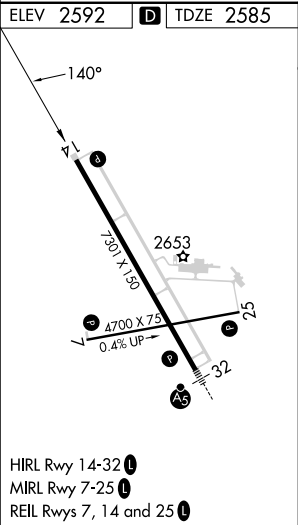


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct LUFGI and hold.

ASOS 118.375	MINNEAPOLIS CENTER 124.25 236.825	UNICOM 123.0 (CTAF) 0
-----------------	--------------------------------------	--------------------------

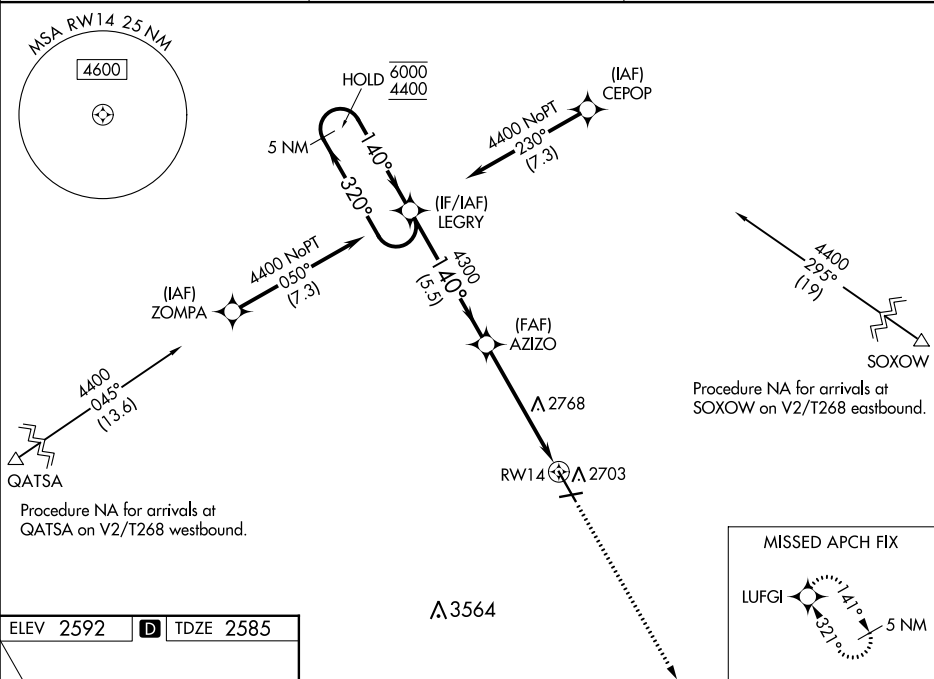

5 NM Holding Pattern LEGRY 6000 ← 320° 4400 → 140° GP 3.00° TCH 50 5.5 NM 4300 4300 4 NM 1.2 NM 1.2 NM to RW14 RW14 5000 LUFGI				
CATEGORY	A	B	C	D
LPV DA	2785-¾ 200 (200-¾)			
LNAV/VNAV DA	2835-¾ 250 (300-¾)			
LNAV MDA	3020-1	435 (500-1)	3020-1¼	435 (500-1½)
CIRCLING	3060-1	468 (500-1)	3120-1½ 528 (600-1½)	3200-2 608 (700-2)