

RADAR or DME required.


ALSF-1

* When ALS inop, increase RVR to 40 and vis to ¾ mile.

** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1½ miles.

MISSED APPROACH: Climb to 2200 via GSB TACAN R-261 to TULME and hold.

ATIS ★ 317.625	APP CON 258°-110° 123.7 290.9 111°-257° 119.7 273.6	TOWER ★ 126.25 370.875	GND CON 138.1 275.8	CLNC DEL 128.025 270.8
-------------------	---	---------------------------	------------------------	---------------------------

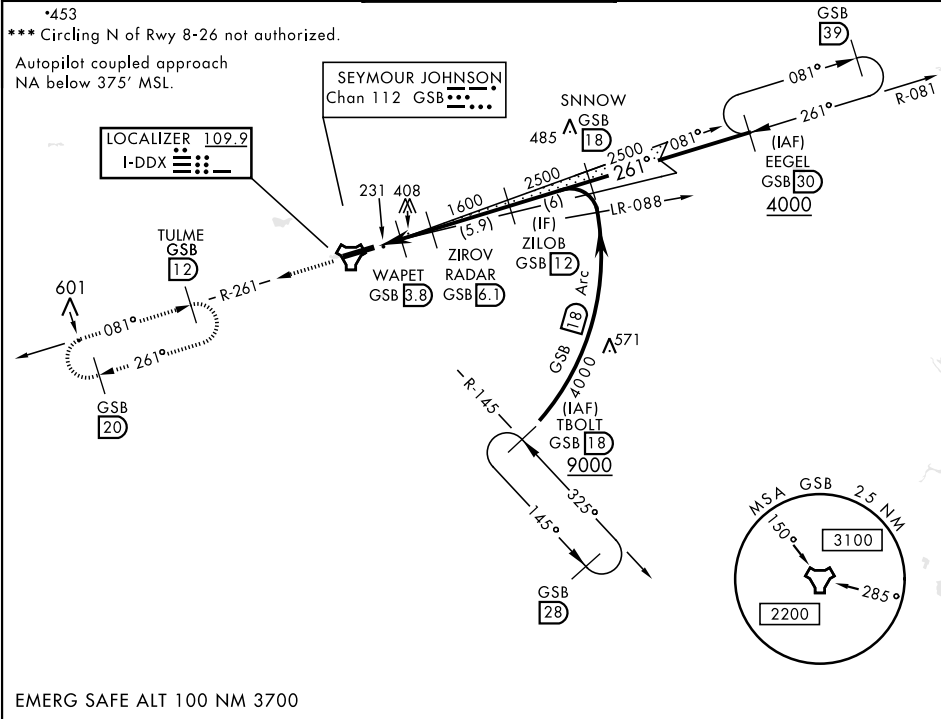

EMERG SAFE ALT 100 NM 3700

ELEV 109

TDZE 109

2200

TULME

GSB R-261

R-261

12

HIRL Rwy 8-26

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

☒ CIRCLING

580-1
471 (500-1)

600-1
491 (500-1)

680-1½
571 (600-1½)

740-2
631 (700-2)

740-2¼
631 (700-2¼)

CATEGORY	A	B	C	D	E
S-ILS 26 *	309/24		200	(200-½)	
S-LOC 26 **	500/24 391 (400-½)		500/35 391 (400-¾)		