


WAAS CH 70709 W35D	APP CRS 350°	Rwy Idg TDZE 480 Apt Elev 501
--	------------------------	---


RNAV (GPS) Y RWY 35R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH.	ALSIF-2	MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.
⚠ Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.		

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

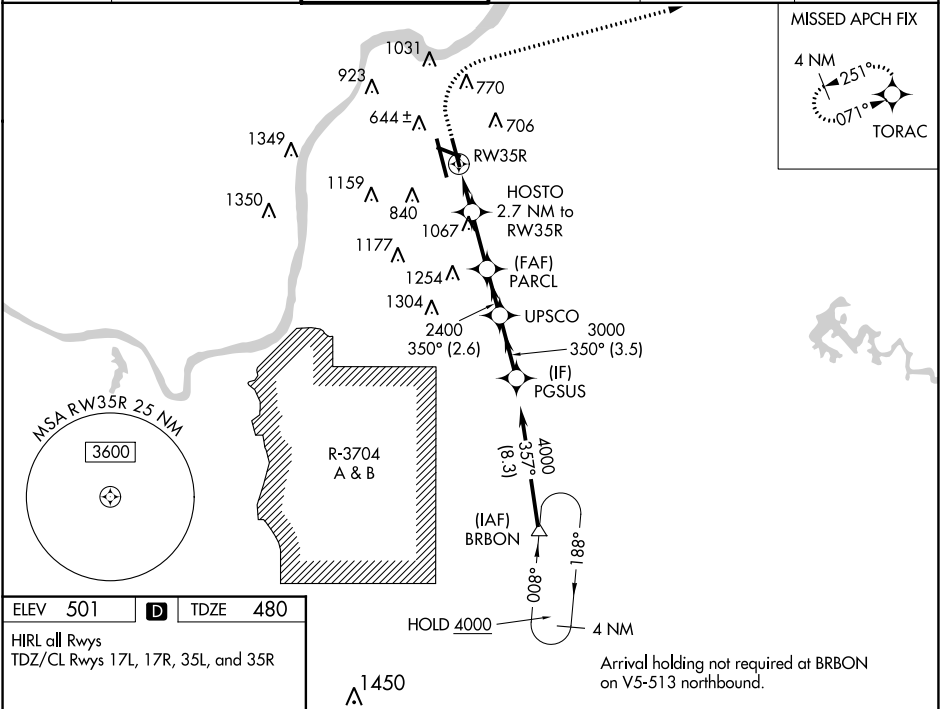

ELEV 501	D	TDZE 480
HIRL all Rwy TDZ/CL Rwy 17L, 17R, 35L, and 35R		

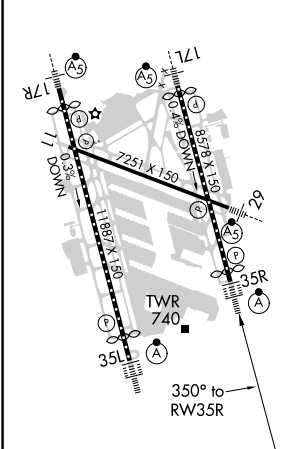

1600	4000	TORAC	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).	
*LNAV only.		PARCL	UPSCO	PGSUS
*1.4 NM to RW35R		HOSTO	2400	350° 4000
*2.7 NM to RW35R		PARCL	2400	3000
*1360		2400	3.5 NM	GP 3.00° TCH 60
1.4		1.3 NM	3.2 NM	2.6 NM
CATEGORY	A	B	C	D
LPV DA	680/18		200 (200-½)	
LNAV/VNAV DA	909/50		429 (500-1)	
LNAV MDA	1000/24	520 (500-½)	1000/55	520 (500-1)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)