

D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/R, 12, 26L/R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
119.45 290.325


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
5000

TAKEOFF MINIMUMS

- Rwy 8L: Standard with minimum climb of 500' per NM to 520, then minimum climb of 215 to 1400.
Rwy 8R: Standard with minimum climb of 500' per NM to 520, then minimum climb of 235 to 1400.
Rwy 9: Standard with minimum climb of 500' per NM to 520, then minimum climb of 240 to 1400.
Rwy 12: Standard with minimum climb of 500' per NM to 520, then minimum climb of 230 to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500' per NM to 520.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K, if unable, advise ATC.

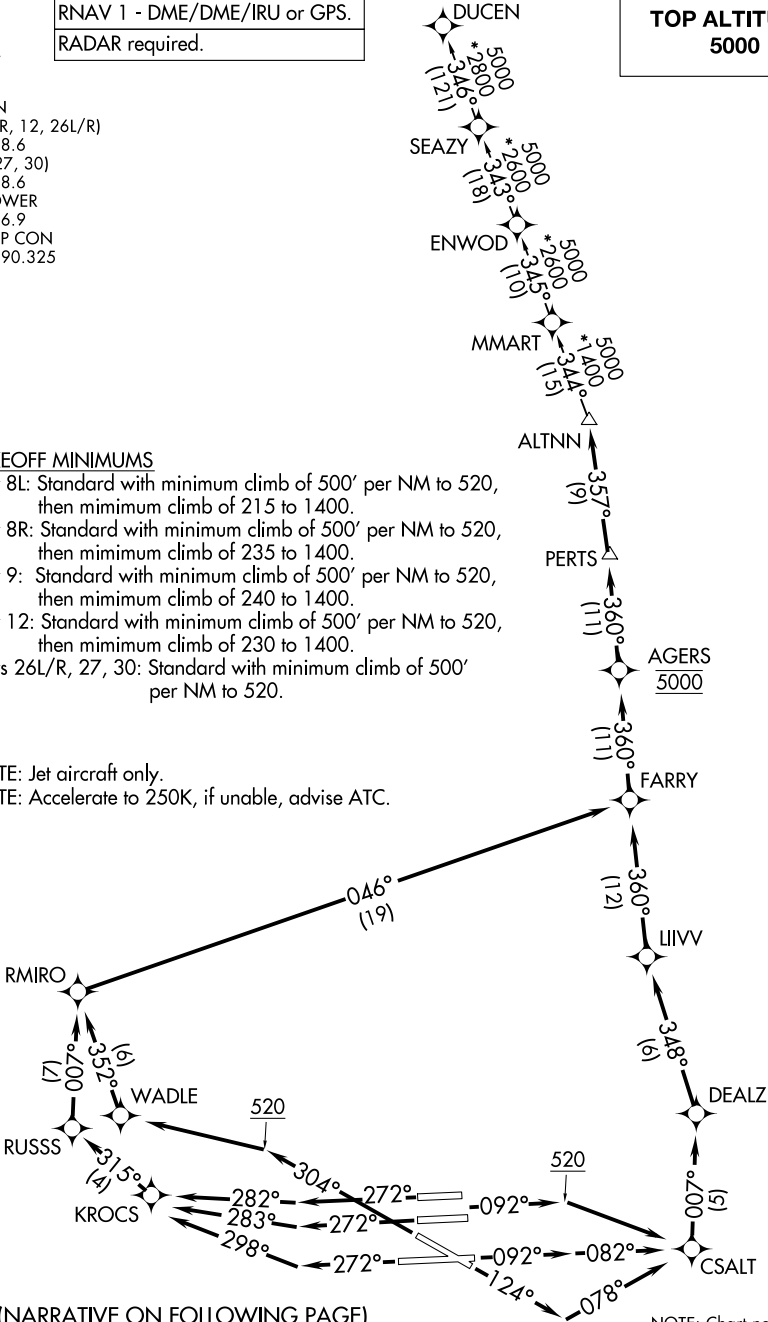

SE-3, 18 MAY 2023 to 15 JUN 2023

SE-3, 18 MAY 2023 to 15 JUN 2023