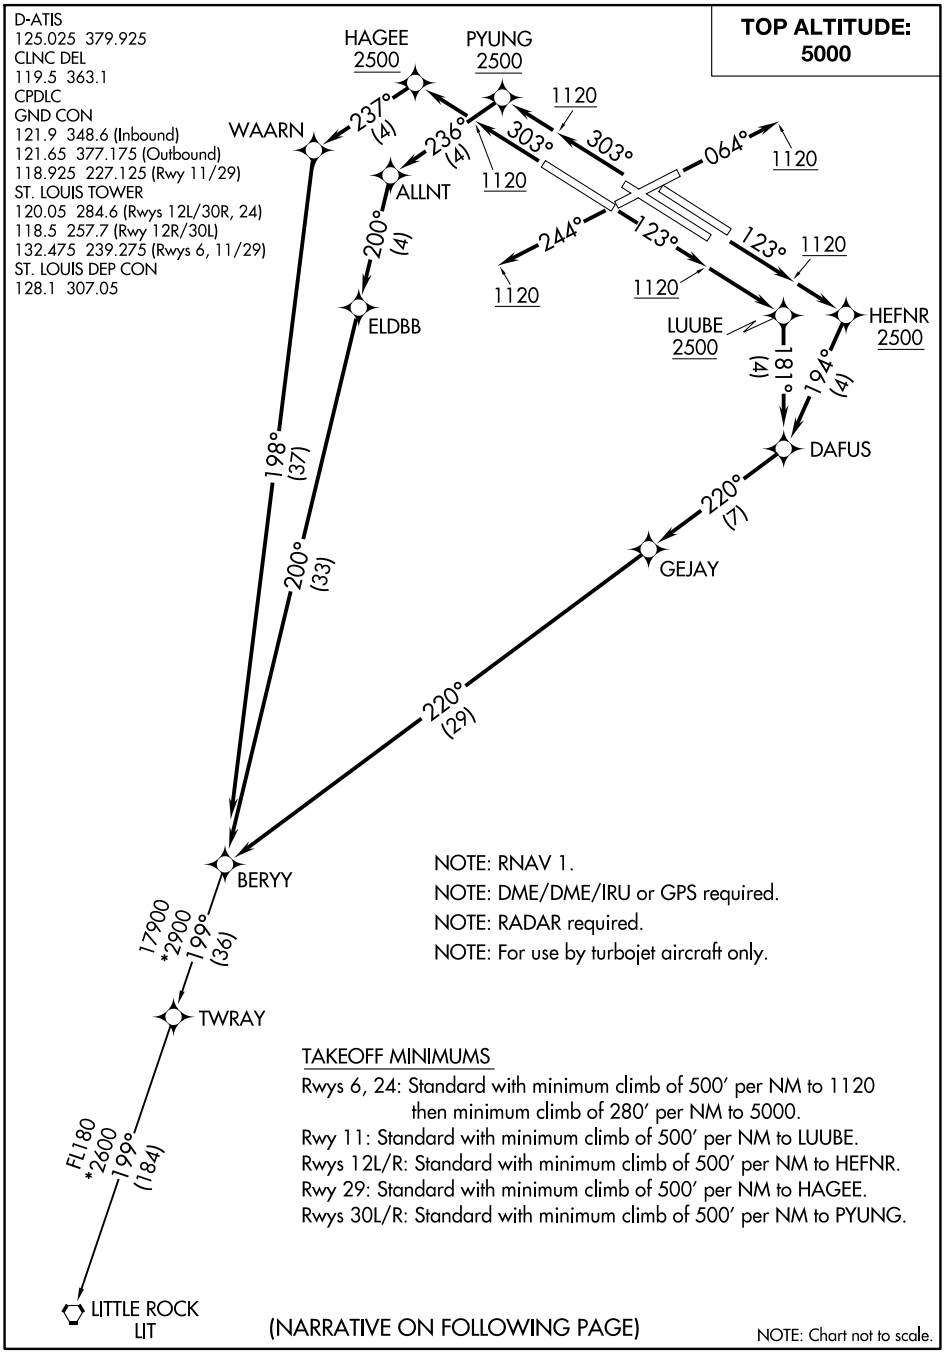
D-ATIS
125.025 379.925
CLNC DEL
119.5 363.1
CPDLC
GND CON
121.9 348.6 (Inbound)
121.65 377.175 (Outbound)
118.925 227.125 (Rwy 11/29)
ST. LOUIS TOWER
120.05 284.6 (Rwys 12L/30R, 24)
118.5 257.7 (Rwy 12R/30L)
132.475 239.275 (Rwys 6, 11/29)
ST. LOUIS DEP CON
128.1 307.05
TOP ALTITUDE: 5000
HAGEE 2500
PYUNG 2500
WAARN
ALLNT
ELDBB
LUUBE 2500
HEFNR 2500
DAFUS
GEJAY
BERYY
TWRAY
LITTLE ROCK LIT
237° (4)
236° (4)
303°
303°
064°
1120
200° (4)
244°
123°
123°
181° (4)
194° (4)
198° (37)
200° (33)
220° (7)
220° (29)
17900 *2900 199° (36)
FL180 *2600 199° (184)
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: For use by turbojet aircraft only.
TAKEOFF MINIMUMS
Rwys 6, 24: Standard with minimum climb of 500′ per NM to 1120 then minimum climb of 280′ per NM to 5000.
Rwy 11: Standard with minimum climb of 500′ per NM to LUUBE.
Rwys 12L/R: Standard with minimum climb of 500′ per NM to HEFNR.
Rwy 29: Standard with minimum climb of 500′ per NM to HAGEE.
Rwys 30L/R: Standard with minimum climb of 500′ per NM to PYUNG.
(NARRATIVE ON FOLLOWING PAGE)
NOTE: Chart not to scale.