



|         |          |       |
|---------|----------|-------|
| APP CRS | Rwy Idg  | 11002 |
| 212°    | TDZE     | 2346  |
|         | Apt Elev | 2385  |

RNAV (RNP) Z RWY 21

SPOKANE INTL (GEG)

|                                                                                                                                                                                                                    |        |                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP AR APCH.                                                                                                                                                                                                       | ALSF-2 | MISSED APPROACH: Climb to 5000 on track 212° to IRUHO and on track 252° to GANGS and hold.<br>*Missed approach requires minimum climb of 310 feet per NM to 3000. |
| ▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 43°C. For inop ALS increase RNP 0.11 visibility all Cats to ¾, RNP 0.15 visibility all Cats to 1½ and RNP 0.30 visibility all Cats to 1¾. |        |                                                                                                                                                                   |

|                 |                                                       |               |             |          |
|-----------------|-------------------------------------------------------|---------------|-------------|----------|
| ATIS            | SPOKANE APP CON                                       | SPOKANE TOWER | GND CON     | CLNC DEL |
| 124.325 254.375 | 123.75 282.25 (205°-025°)<br>133.35 263.0 (026°-204°) | 118.3 278.3   | 121.9 348.6 | 127.55   |

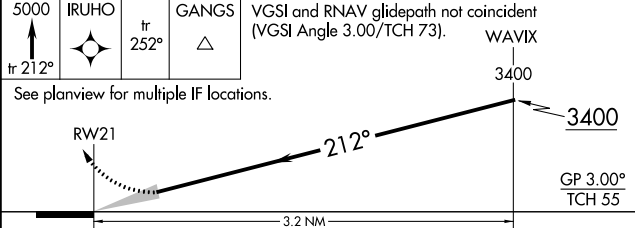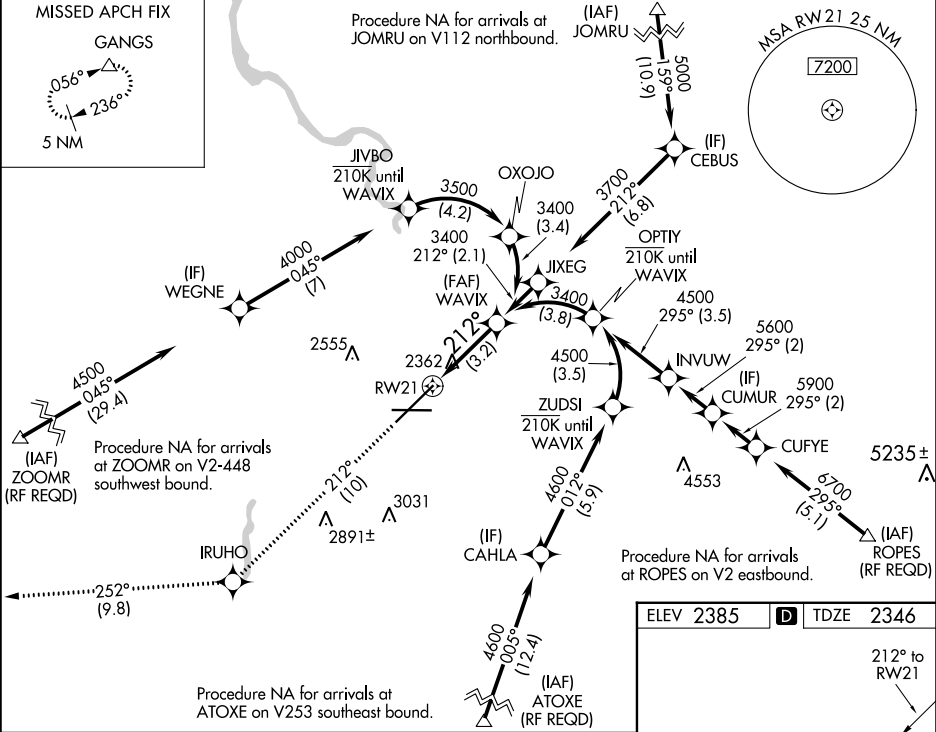

| CATEGORY     | A | B       | C           | D |
|--------------|---|---------|-------------|---|
| RNP 0.11 DA* |   | 2596/24 | 250 (300-½) |   |
| RNP 0.15 DA  |   | 2699/30 | 353 (400-⅝) |   |
| RNP 0.30 DA  |   | 2752/45 | 406 (400-⅞) |   |

ELEV 2385 TDZE 2346

TDZ/CL Rwy 3 and 21  
REIL Rwy 8 and 26  
HIRL Rwy 3-21  
MIRL Rwy 8-26