



ILS Y or LOC Y RWY 30

LOC LVPS 109.1 Chan 28		APCH CRS 300°		Rwy Idg 11,987 THRE 49 Arpt Elev 84		AL-436 [USAF] EGLIN AFB/DESTIN-FT WALTON BEACH (KVPS)	
DME or RADAR required. (for LOC approach)						ALSF-1  † MISSED APPROACH: Climb straight ahead to 600, then climbing right turn to 3000, intercept CEV VORTAC R-170 to CEW and hold.	
* When ALS inop, increase RVR to 40, vis to ¾ mile. ** When ALS inop, increase RVR to 55, vis to 1 mile.							
ATIS ★ 134.625 273.5		APP CON 125.1 281.45 271°-089° 132.1 360.6 090°-270°		TOWER 118.2 353.65		GND CON 121.8 335.8	
						CLNC DEL 127.7 377.2	

† Missed approach requires use of RNAV or ATC RADAR monitoring.

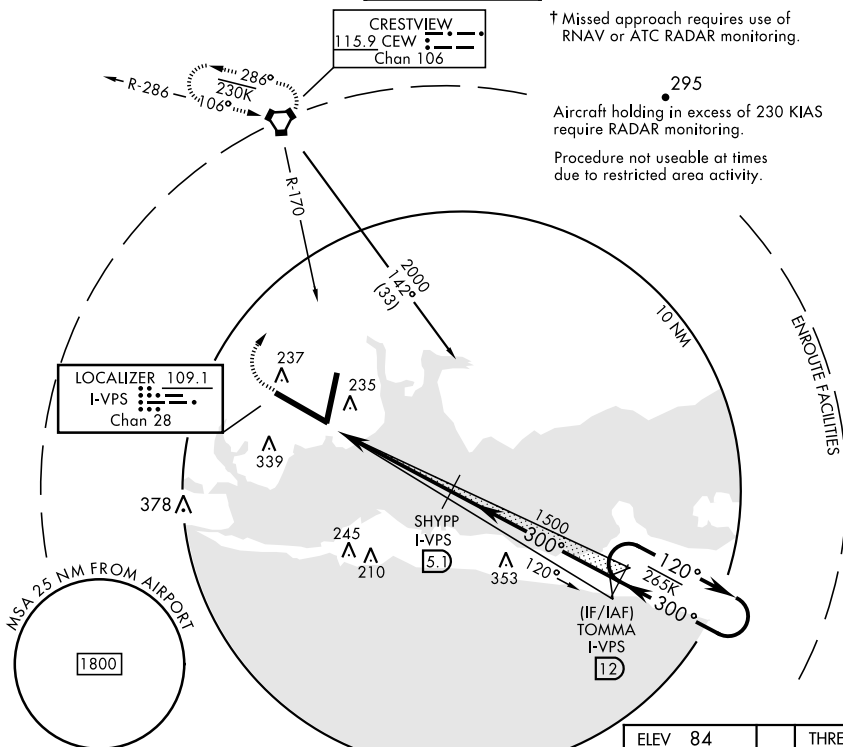

EMERG SAFE ALT 100 NM 3600

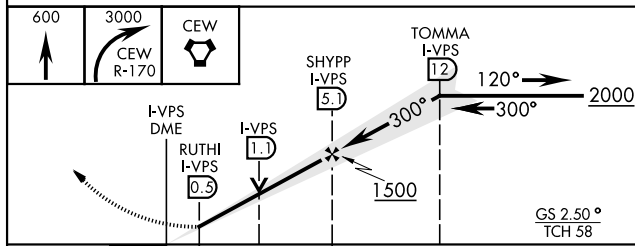

		0.5						
CATEGORY	A		B		C		D	E
S-ILS 30*	249/24				200		(200-½)	
S-LOC 30**	420/24	371	(400-½)		420/35		371	(400-⅝)
CIRCLING	660-1	576	(600-1)		760-2 676 (700-2)	760-2¼ 676 (700-2¼)	760-2½ 676 (700-2½)	

ILS Y or LOC Y RWY 30