


WAAS CH 82125 W22A	APP CRS 224°	Rwy Idg TDZE 274 Apt Elev 279	RNAV (GPS) RWY 22 WALNUT RIDGE RGNL (ARG)
--	------------------------	---	---

⚠ Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ½ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct XIHAM and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

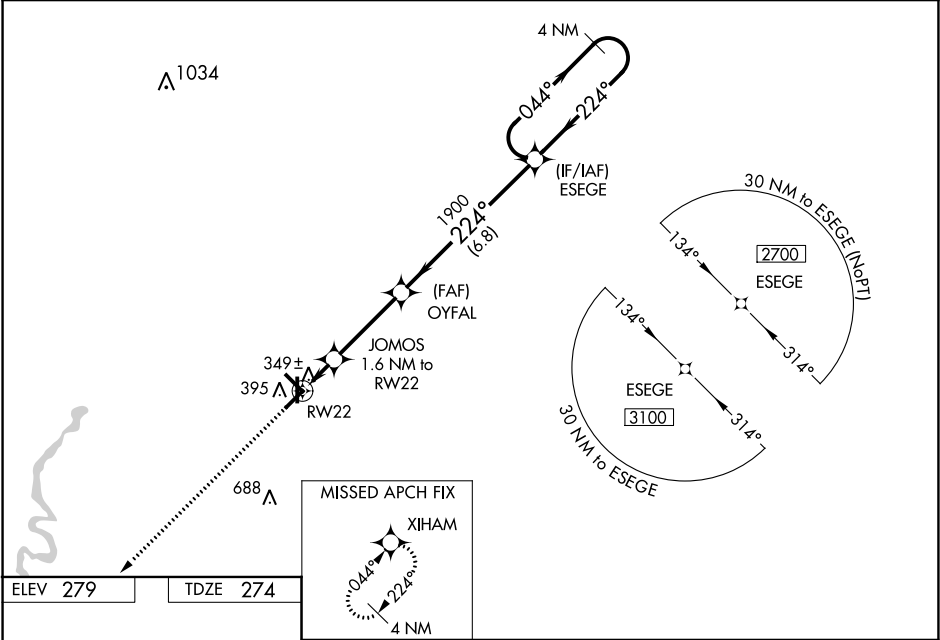

REIL Rwy 18

MIRL Rwy 4-22, 18-36

338

5003 X 150

5001 X 150

6001 X 150

36

224°

2700

XIHAM

*LNAV only.

RW22

*0.9 NM to RW22

JOMOS 1.6 NM to RW22

OYFAL 1900

ESEGE

4 NM Holding Pattern

044° → 2700

← 224°

GP 3.00°

TCH 45

0.9 NM

0.7 NM

3.4 NM

6.8 NM

820*

1900

CATEGORY	A	B	C	D
LPV DA	524-1 250 (300-1)			
LNAV/VNAV DA	524-1 250 (300-1)			
LNAV MDA	600-1 326 (400-1)			
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)