



ILS or LOC RWY 13

LOC I-OVI 110.35	APCH CRS 128°	Rwy Idg 8196 TDZE 4294 Arprt Elev 4295	AL-512 [USAF]	CANNON AFB (KCVS)
ATC RADAR or DME required.			SSALR	† MISSED APPROACH: Climb to 6000 out CVS TACAN R-130 5.6 DME (HOMEP) then climbing right turn to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.
* When ALS inop, increase vis to ¾ mile.			A3	
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225


** When ALS inop, increase CAT AB vis to 1 mile;
CAT CDE vis to 1¾ miles.

† Missed approach requires use of
RNAV or ATC radar monitoring.

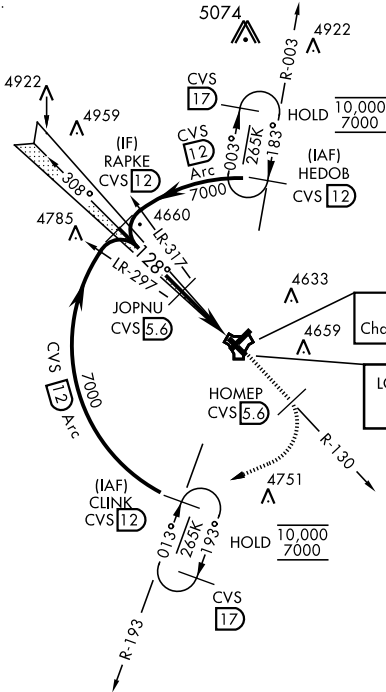

EMERG SAFE ALT 100 NM 8000

RAPKE 12 7000 GS 3.00° TCH 45		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 37). 128° 5900	JOPNU 5.6 4.9 NM	6000 CVS R-130 HOME CVS R-130 5.6	7000	CLINK CVS R-193 12
CATEGORY	A	B	C	D	E	
S-ILS 13 *	4544-½		250	(300-½)		
S-LOC 13 **	4760-½ 466 (500-½)		4760-1 466 (500-1)			
CIRCLING	4840-1		4860-1½	5000-2¼	5020-2½	
	545 (600-1)		565(600-1½)	705(800-2¼)	725(800-2½)	

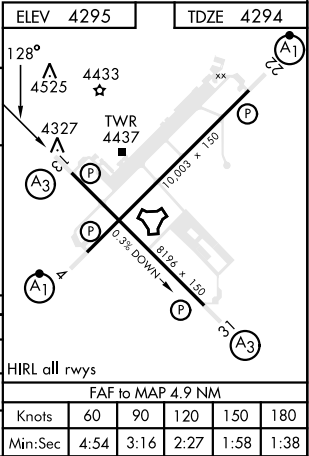

ILS or LOC RWY 13

SW-1, 18 MAY 2023 to 15 JUN 2023

SW-1, 18 MAY 2023 to 15 JUN 2023