


WAAS CH 99616 W13A	APP CRS 128°	Rwy Idg TDZE 592 Apt Elev 598
--	------------------------	---

RNAV (GPS) RWY 13
ABRAHAM LINCOLN CAPITAL (SPI)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Lincoln altimeter setting: increase all DA 57 feet and MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ SM, and increase LNAV and Circling Cats C and D visibility ¼ SM. Baro-VNAV NA when using Lincoln altimeter setting. VDP NA when using Lincoln altimeter setting.

MISSED APPROACH:
Climb to 3100 direct CONOX and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

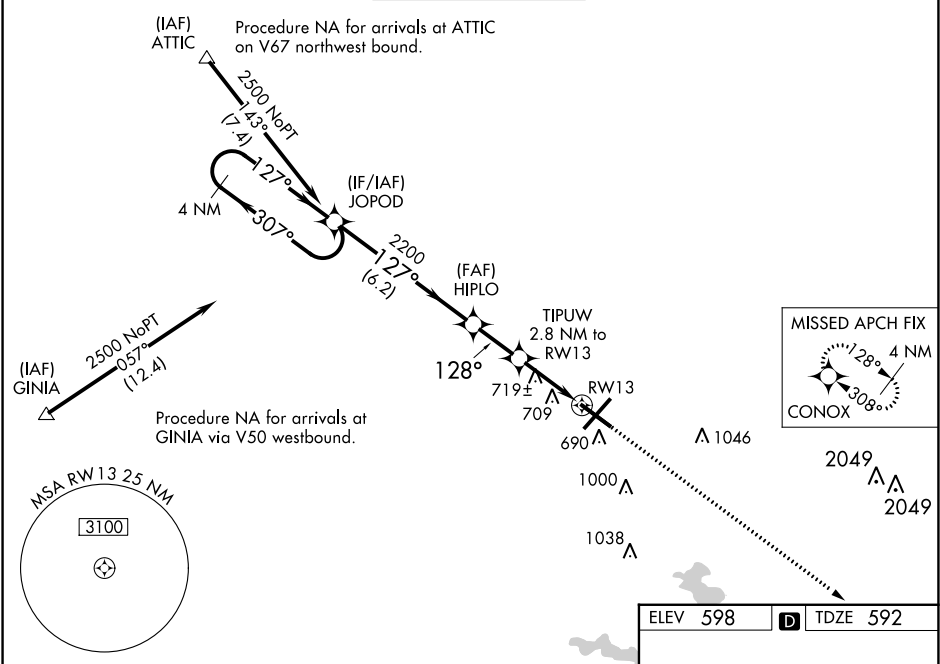

4 NM Holding Pattern		JOPOD		3100 CONOX	
2500 ←307°		127° →		*LNAV only.	
GP 3.00° TCH 50		2200		TIPUW 2.8 NM to RW13 *1.1 NM to RW13	
6.2 NM		2 NM		1.7 NM	
1.1 NM					
CATEGORY	A	B	C	D	
LPV DA	875-1 283 (300-1)				
LNAV/VNAV DA	1011-1½ 419 (500-1½)				
LNAV MDA	980-1 388 (400-1)			980-1¼ 388 (400-1¼)	
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	

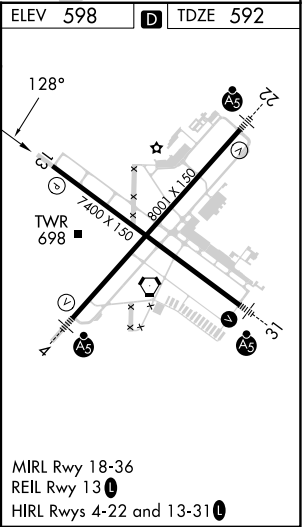

EC-3, 18 MAY 2023 to 15 JUN 2023

EC-3, 18 MAY 2023 to 15 JUN 2023