

WAAS CH 70309 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -16°C (4°F) and above 47°C (116°F). When local altimeter setting not received, use Lincoln altimeter setting: increase all DA 57 feet and MDA 60 feet, increase Circling Cat C and D visibility ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inoperative MALSR increase LPV all Cats visibility to RVR 5000.


MALSR

MISSED APPROACH:
Climb to 2600 direct REYCO and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

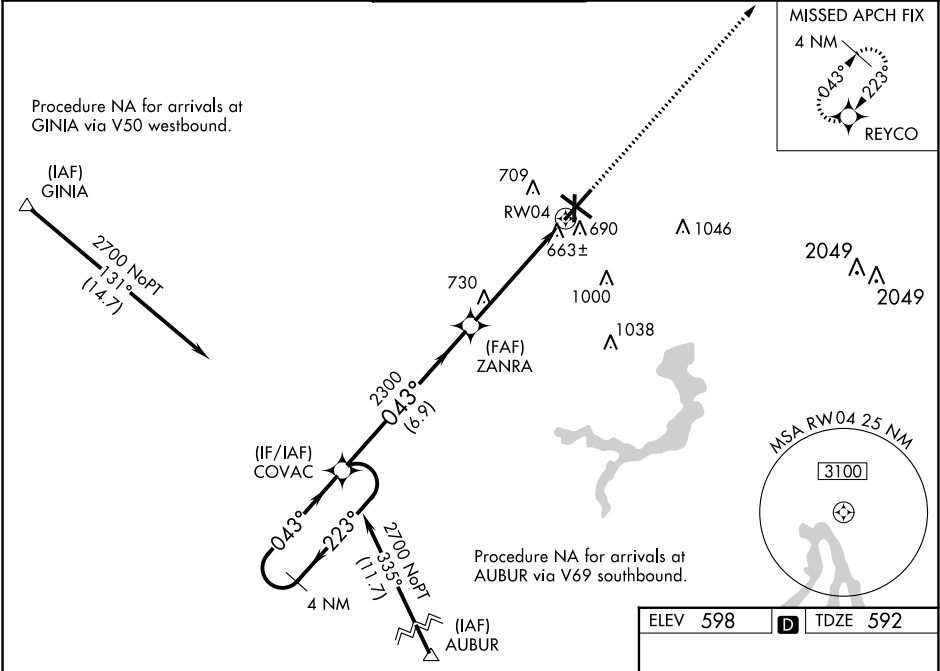

4 NM Holding Pattern		COVAC		ZANRA		RW04	
2700		223°		043°		2300	
GP 3.00°		TCH 56		6.9 NM		3.8 NM	
1.3 NM to RW04		*LNAV only.		2600		REYCO	
CATEGORY		A		B		C	
LPV DA		854/24		262 (300-½)			
LNAV/VNAV DA		931/40		339 (400-¾)			
LNAV MDA		1060/24		468 (500-½)		1060/50 468 (500-1)	
CIRCLING		1060-1 462 (500-1)		1100-1 502 (600-1)		1360-2¼ 762 (800-2¼)	

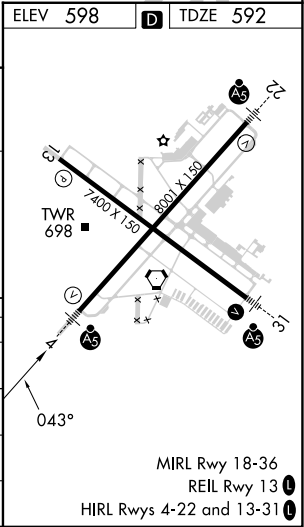

EC-3, 18 MAY 2023 to 15 JUN 2023

EC-3, 18 MAY 2023 to 15 JUN 2023